

ELASTIC SUSPENSION OF PIPES


Buildings



Spring hangers for suspended ceilings with a low natural frequency




Dry lining decoupled with Sylomer® for high damping efficiency

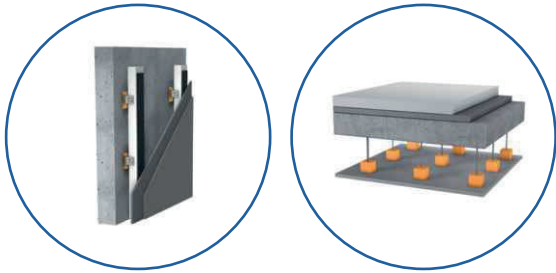

- Noise reduction index that is 4 dB* higher than standard attachment systems
- Effective even in the low frequency range 50 – 250 Hz
- Simple to install
- Minimal suspension height
- Suitable for all dry construction systems
- Allows for a reduction in the number of dry linings with the same damping efficiency
- Products for various load ranges

* results from test report no. B0082-IN-CM-26-M57, B0082-IN-CM-26-M51

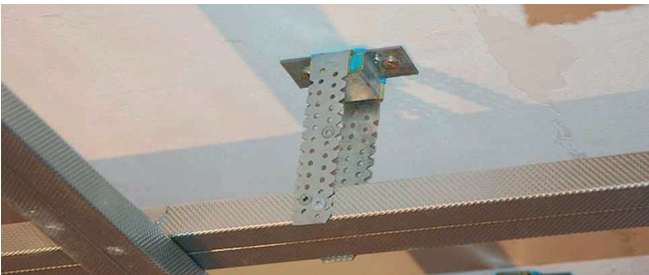

1. Greater noise reduction index for elastically decoupled ceilings
2. Suitable for renovation projects involving apartment ceilings and for new buildings, ranging from theatres to opera houses

Products:

- Acoustics+Sylomer®
- Isotop®