



FLOATING FLOORS

Buildings

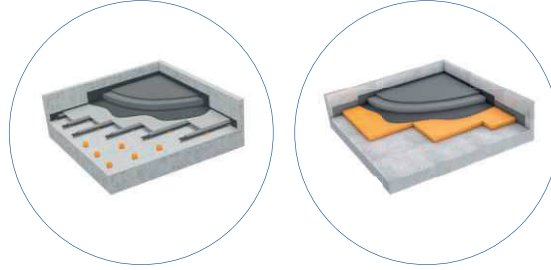

- Excellent impact noise insulation effect for all floor construction types (dry and wet screeds)
- Rate of impact noise reduction up to 33 dB
- Low installed height
- Full-surface or point bearings possible
- Quick and easy to install
- Stable material properties over entire service life
- Monitored quality
- Safety approved for planners and developers
- Free from softeners and pollutants
- Load capacity of up to 5 t/m²

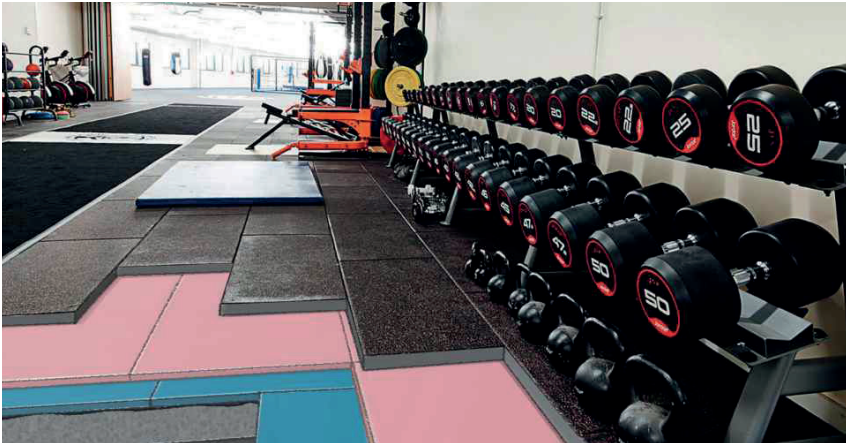

1. Structure of an elastically decoupled floor in a fitness centre
2. Installation of dry panels directly on top of the Getzner Acoustic Floor Mat
3. Sylomer® discrete bearings in construction projects with demanding sound control requirements (theatre, opera, cinema, recording studios, etc.)
4. Acoustic Floor Mat product range



Products:

- Acoustic Floor Mat
- Acoustic Floor Blocks
- Sylomer®