




IM-Mounting

type 10-IM-130-A


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

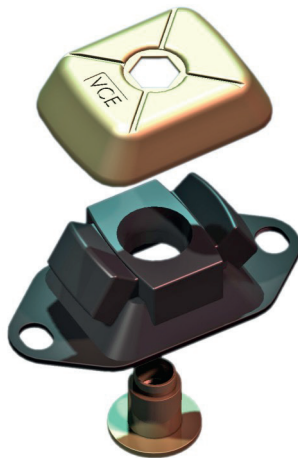


LOAD CHARACTERISTICS

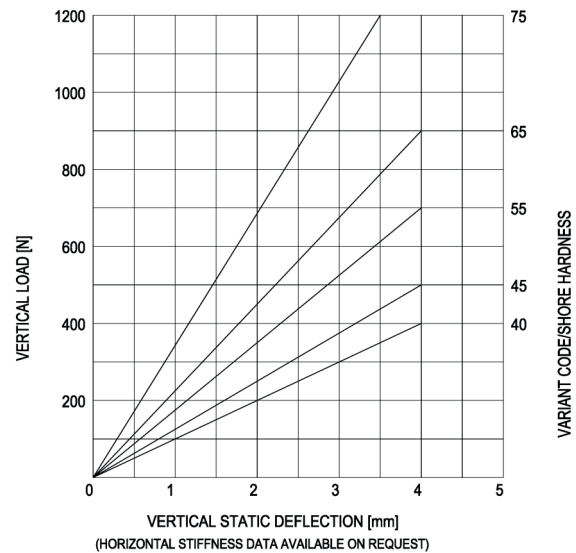


SIDEVIEW

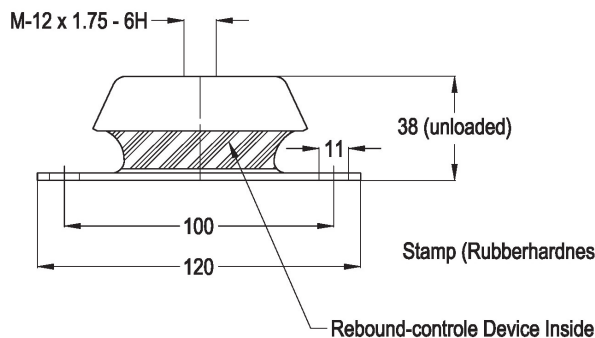

TOPVIEW

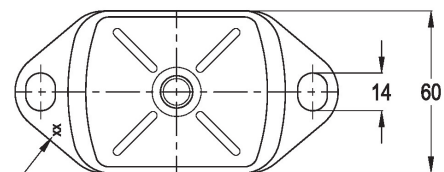

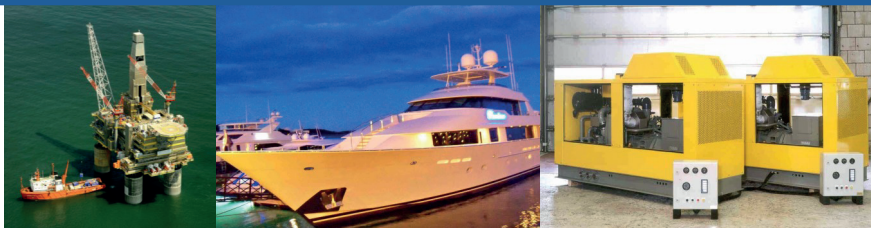



IM-Mounting

type 10-IM-130-B


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

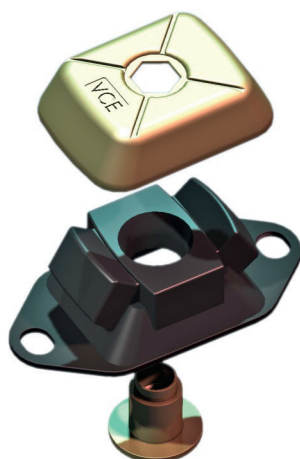


LOAD CHARACTERISTICS

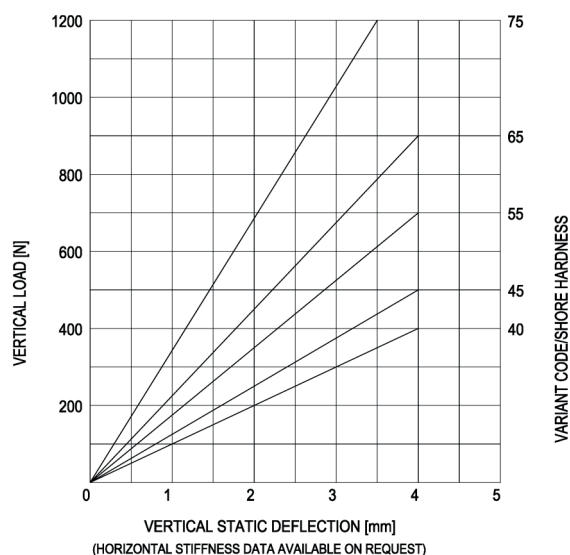

SIDEVIEW

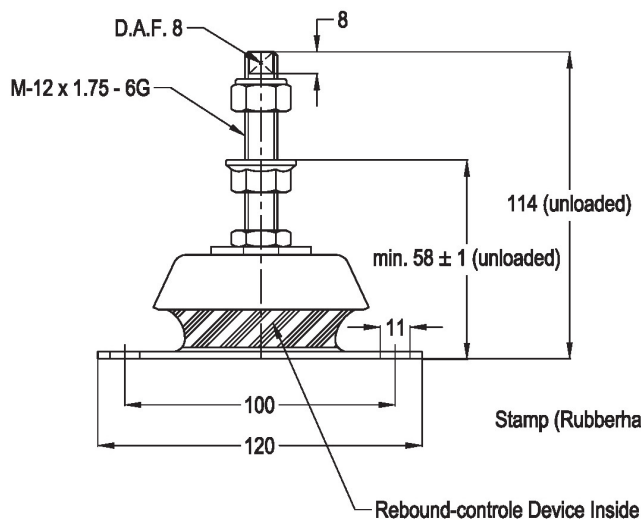

TOPVIEW

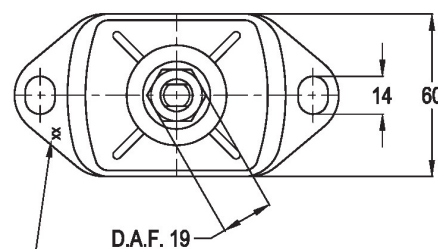




IM-Mounting type 10-IM-130-C


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS

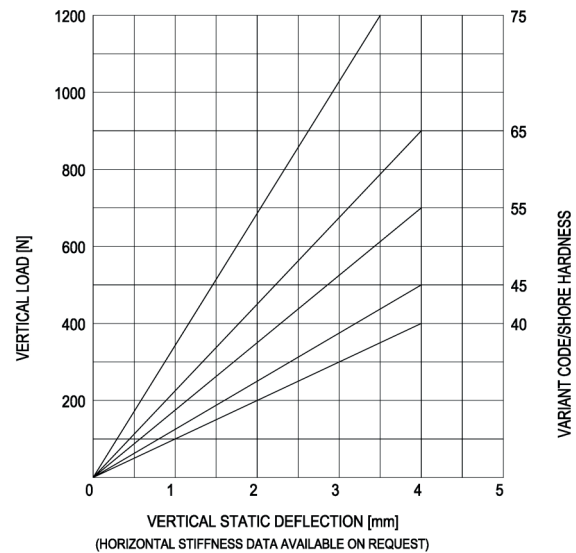

SIDEVIEW

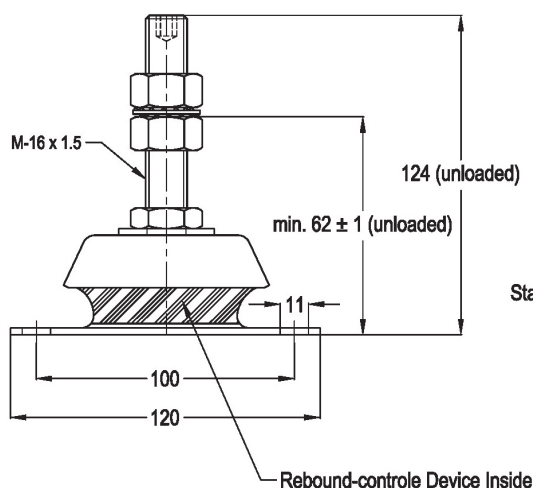

TOPVIEW

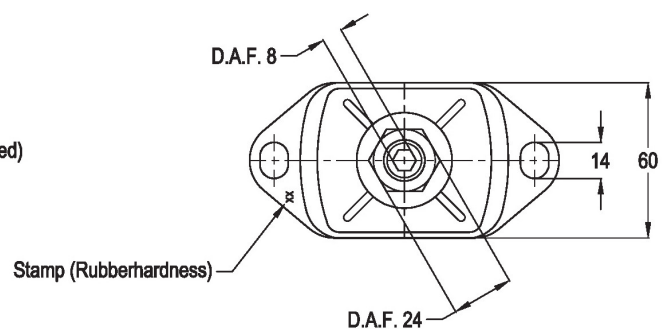





IM-Mounting

type 10-IM-350-A


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

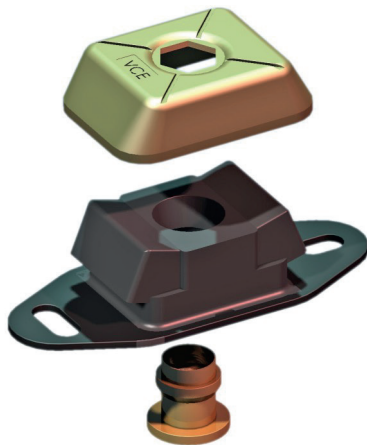


LOAD CHARACTERISTICS

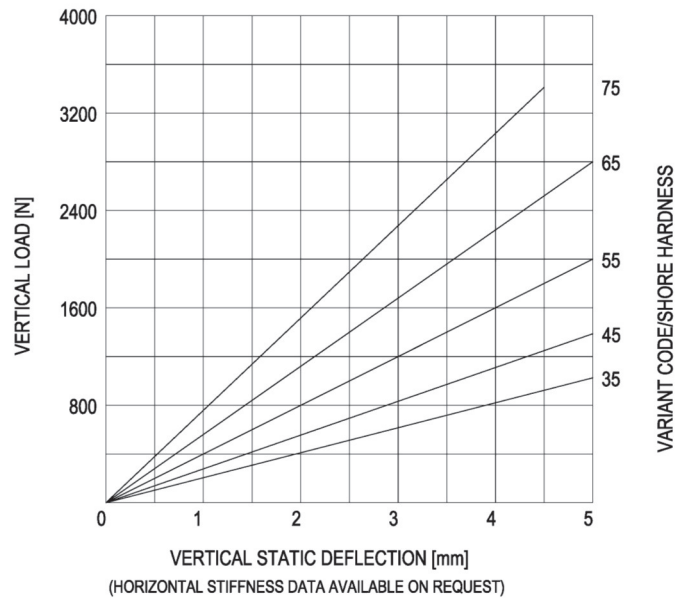

SIDEVIEW

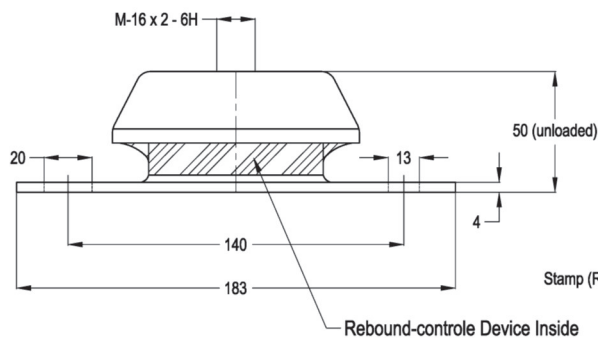

TOPVIEW

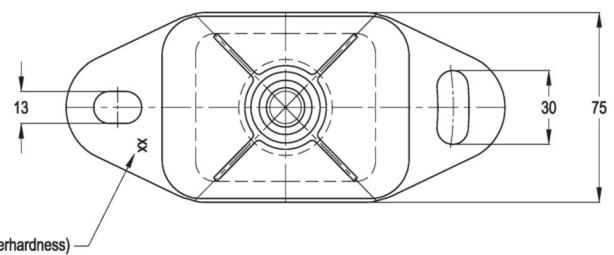



IM-Mounting

type 10-IM-350-B


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS

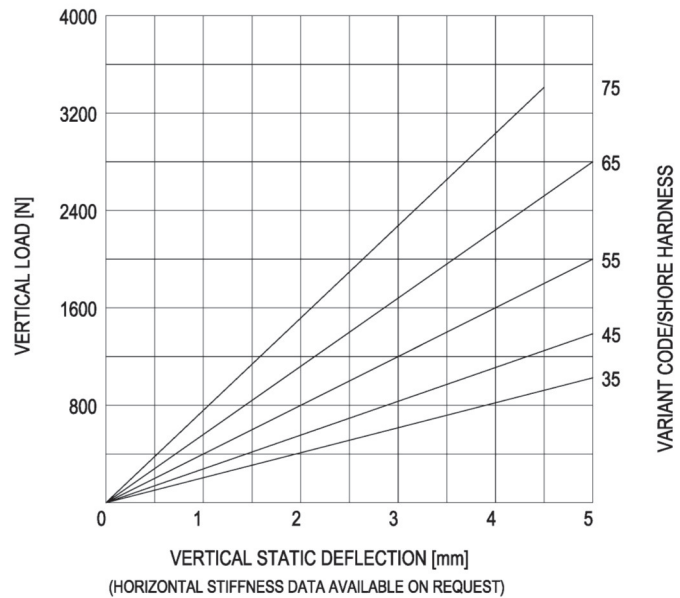

SIDEVIEW

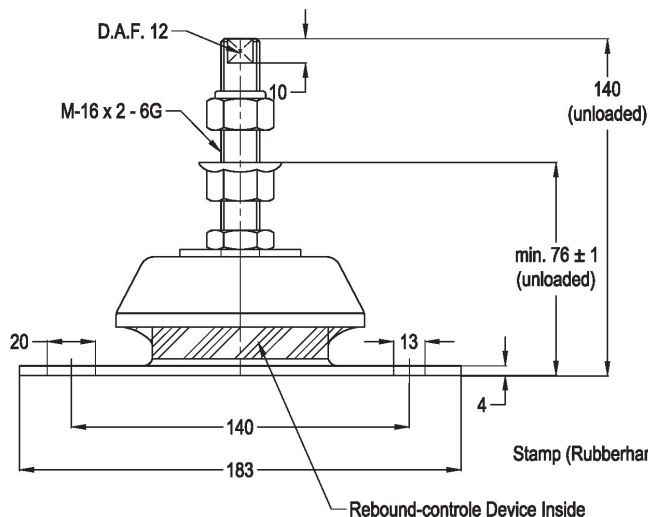

TOPVIEW

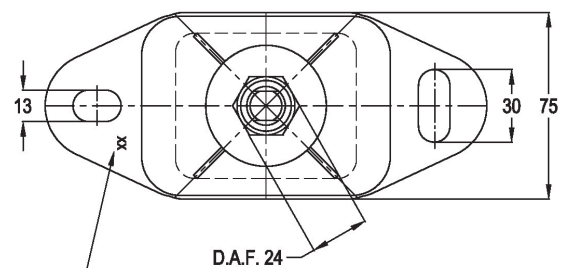




IM-Mounting

type 10-IM-350-C


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

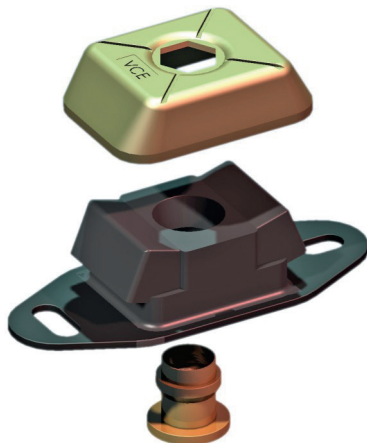


LOAD CHARACTERISTICS

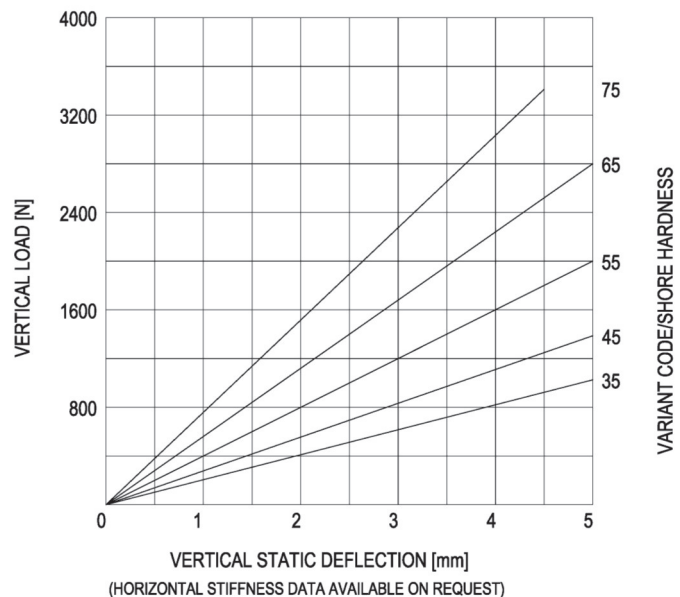

SIDEVIEW

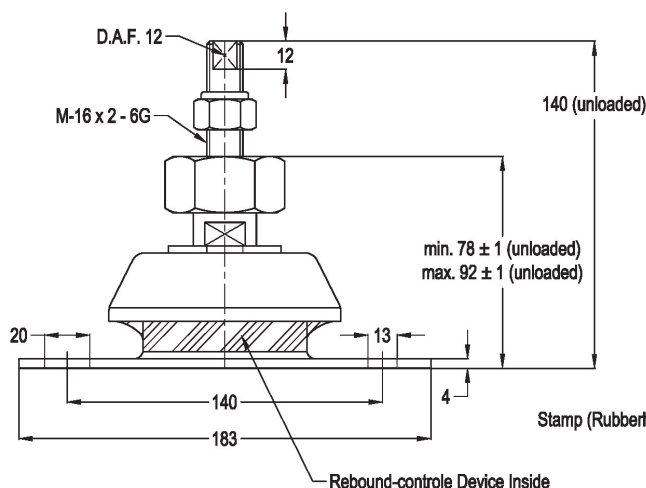

TOPVIEW

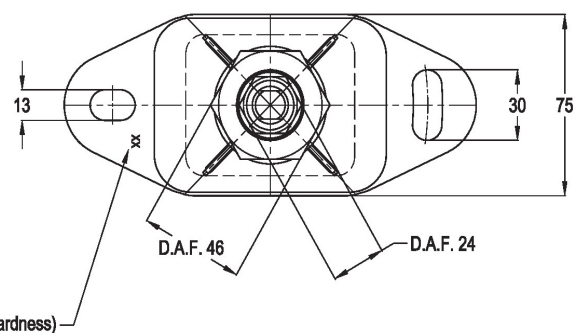




IM-Mounting

type 10-IM-350-D


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

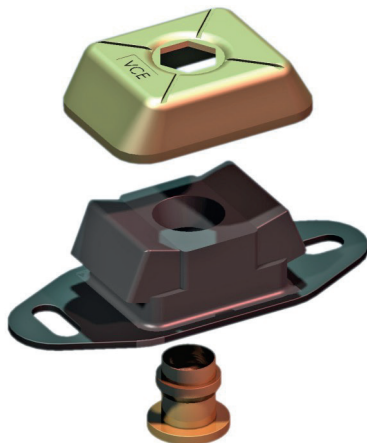


LOAD CHARACTERISTICS

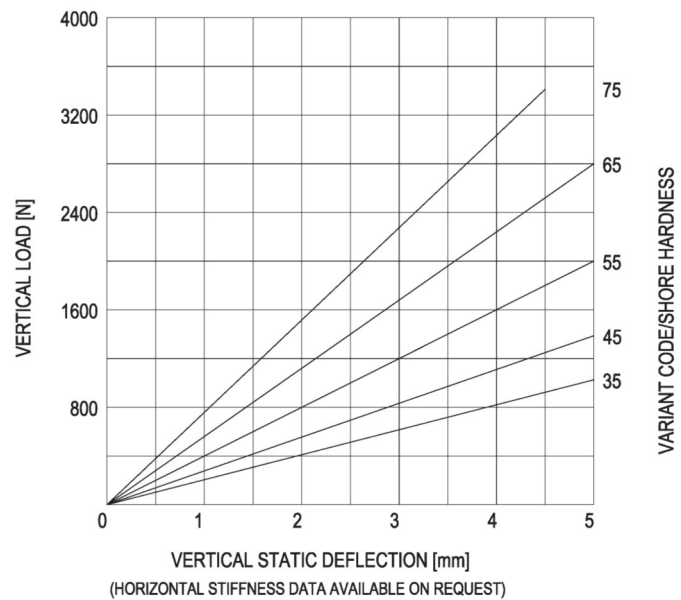

SIDEVIEW

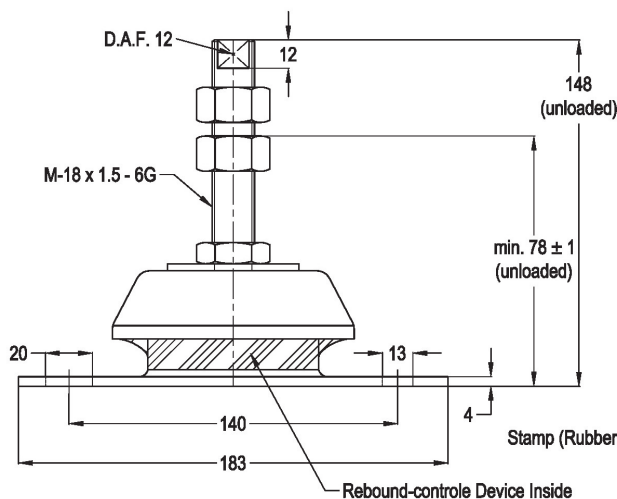

TOPVIEW

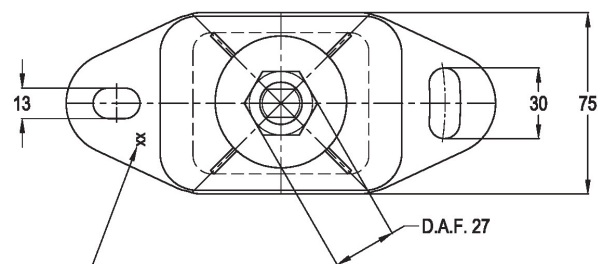



IM-Mounting

type 10-IM-1000-A


Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS IM-1000

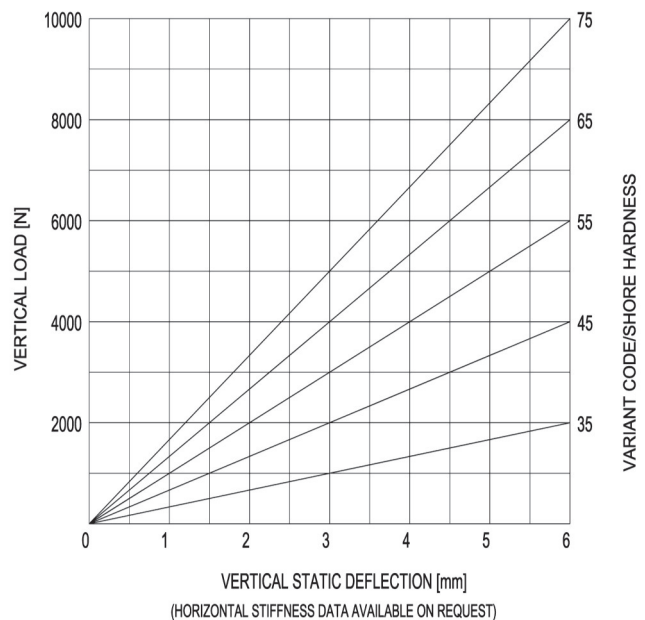

SIDEVIEW

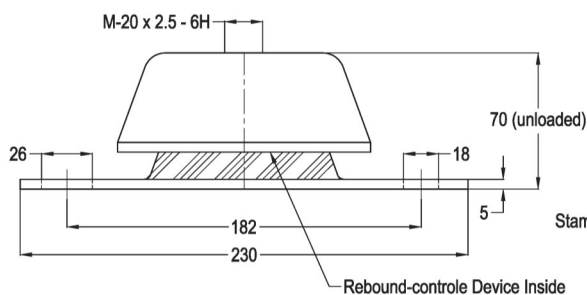

TOPVIEW

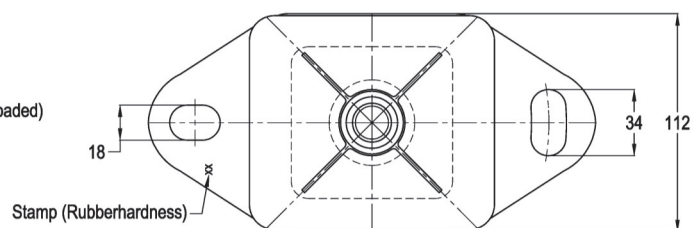




IM-Mounting

type 10-IM-1000-B


Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, genrator sets, pump units, compressor sets, etc.

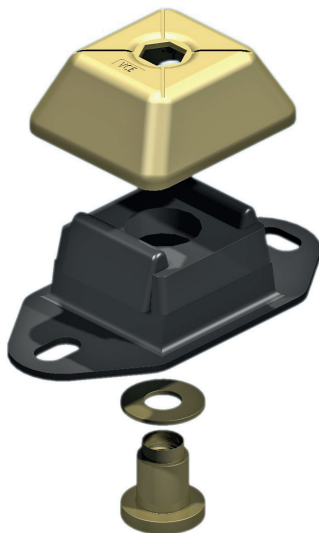


LOAD CHARACTERISTICS IM-1000

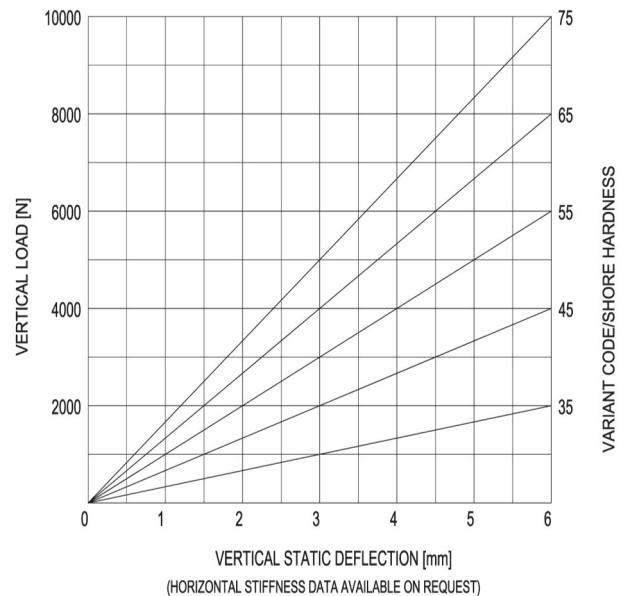

SIDEVIEW

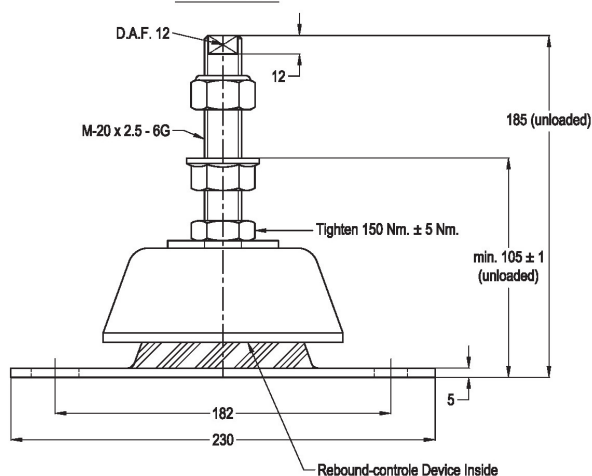

TOPVIEW

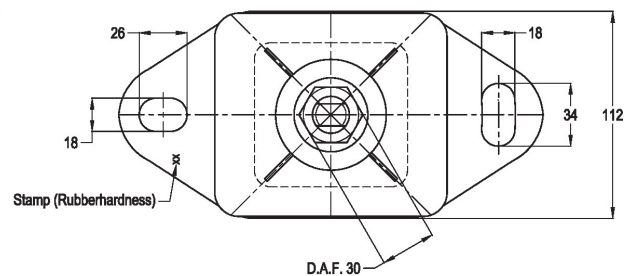




IM-Mounting type 10-IM-1000-C




Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

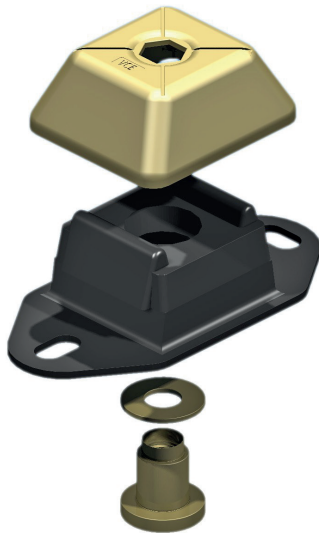

LOAD CHARACTERISTICS IM-1000

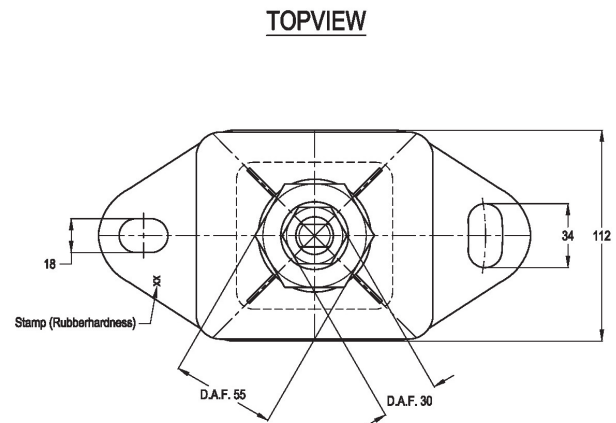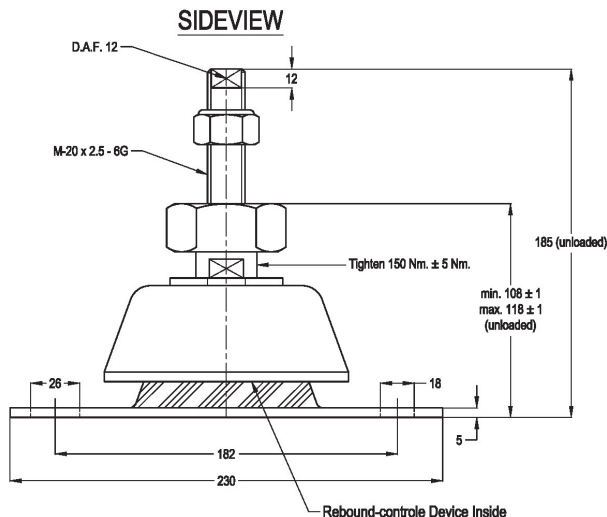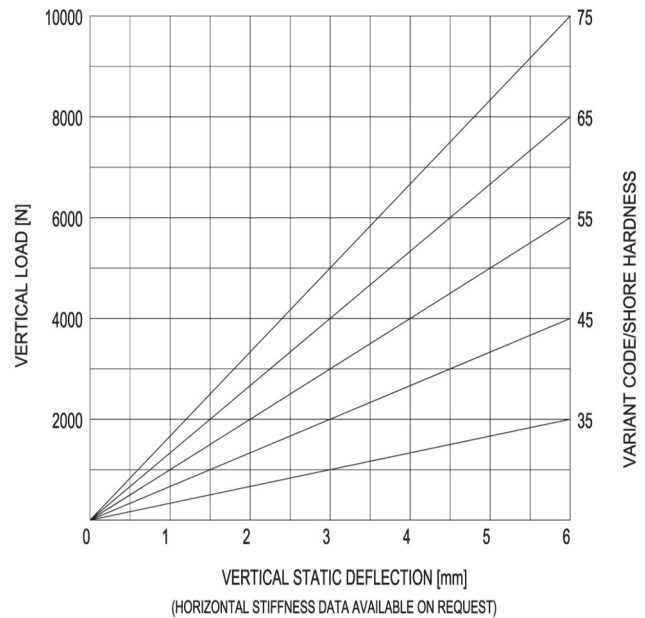



IM-Mounting

type 10-IM-1000-F




Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.



LOAD CHARACTERISTICS IM-1000

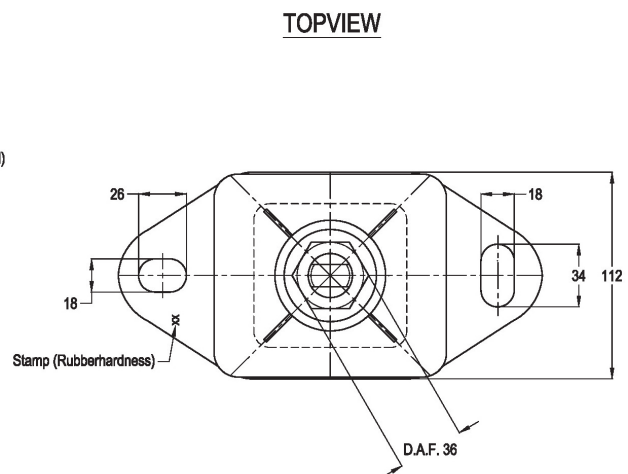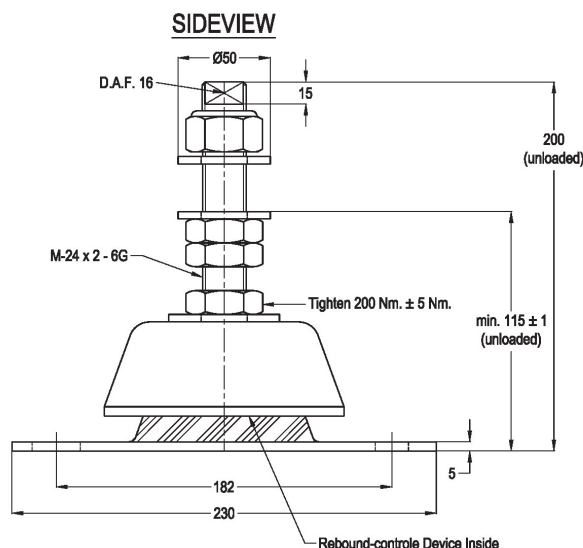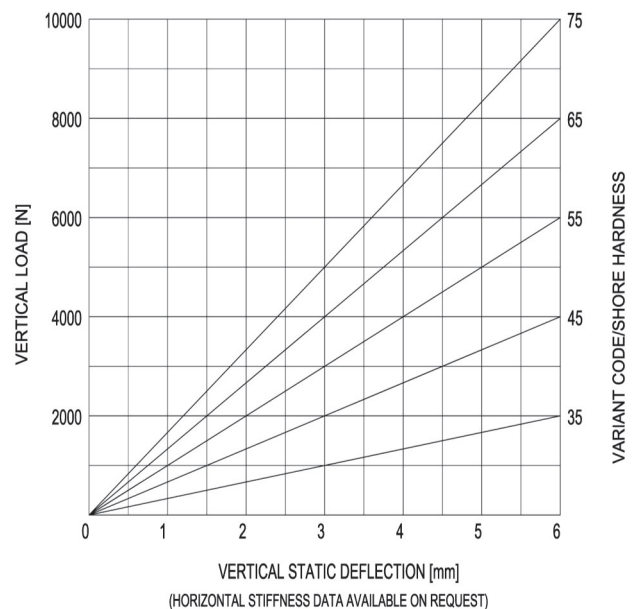





IM-Mounting type 10-IM-2500-A


Max. 3000 kg - 8 mm - 5.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

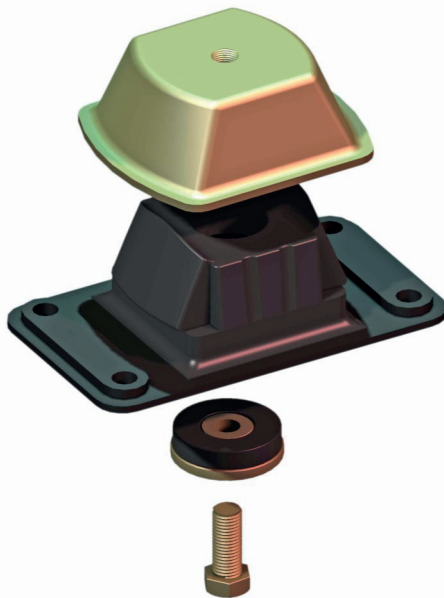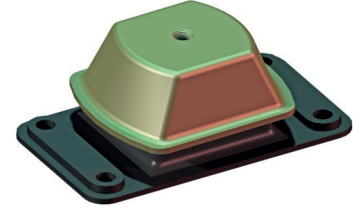

LOAD CHARACTERISTICS

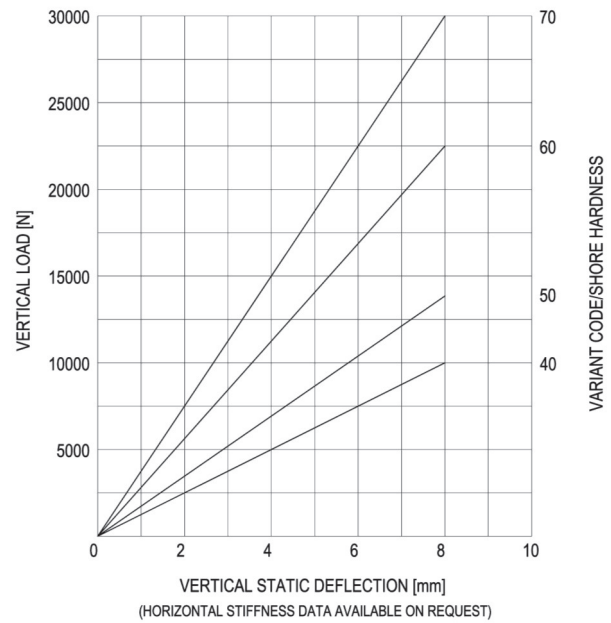

SIDE-VIEW

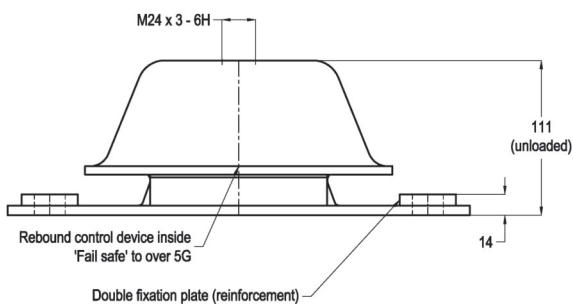

TOP-VIEW

