




IM-Mounting

type 10-IM-130-A


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

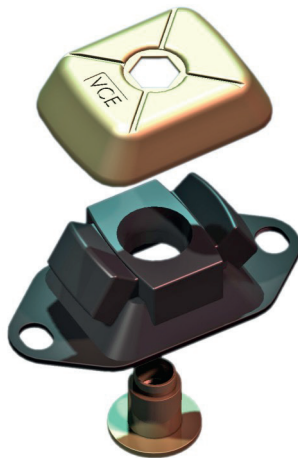


LOAD CHARACTERISTICS

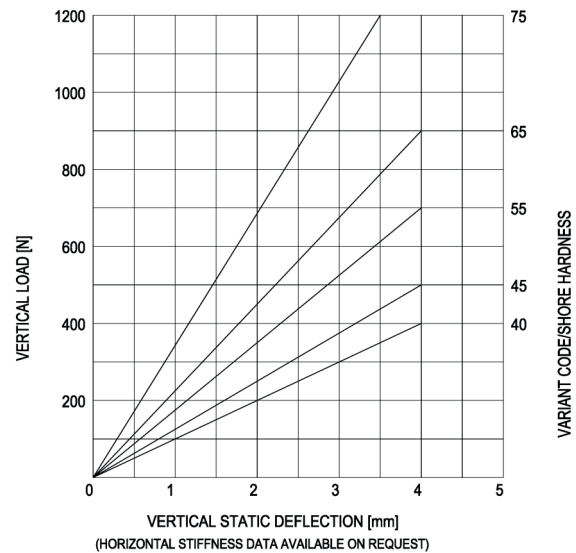

SIDEVIEW

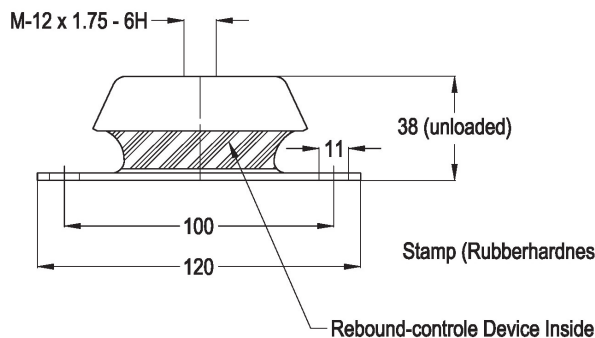

TOPVIEW

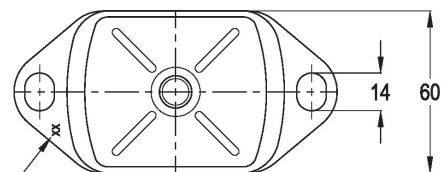





IM-Mounting

type 10-IM-130-B


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

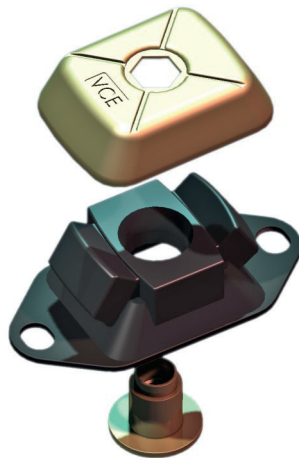


LOAD CHARACTERISTICS

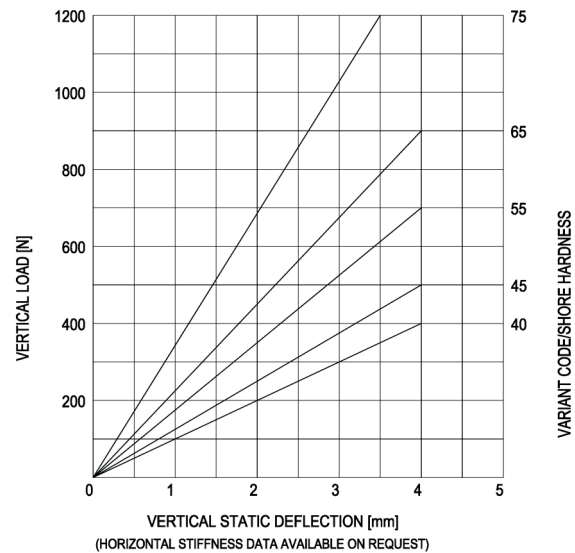

SIDEVIEW

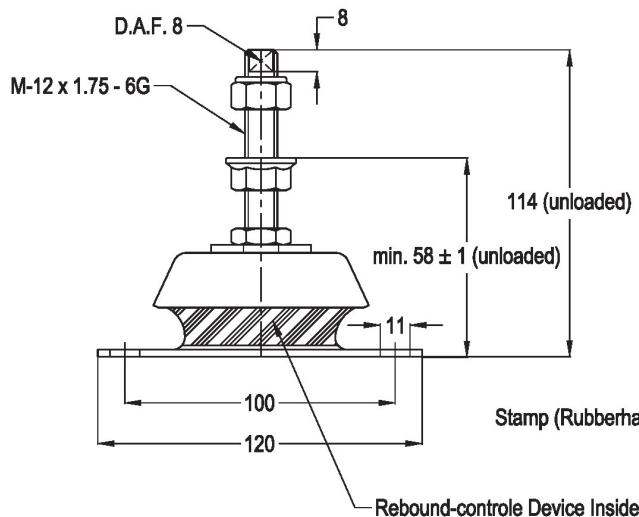

TOPVIEW

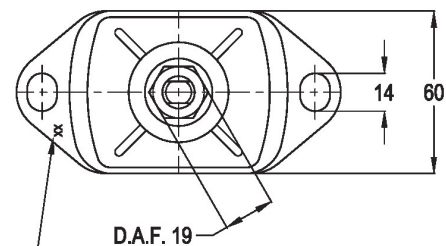




IM-Mounting type 10-IM-130-C


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS

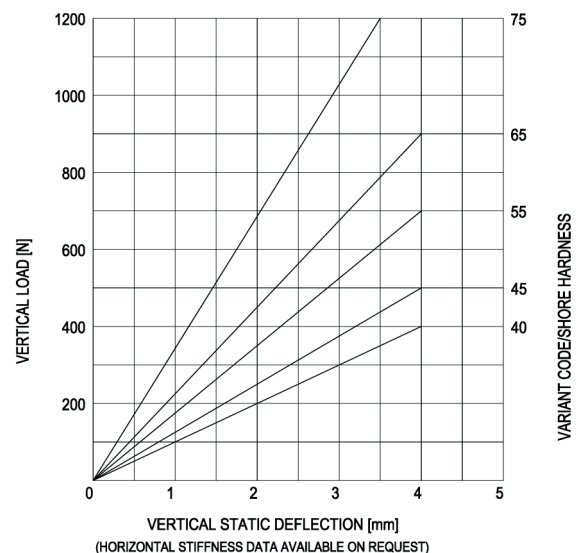

SIDEVIEW

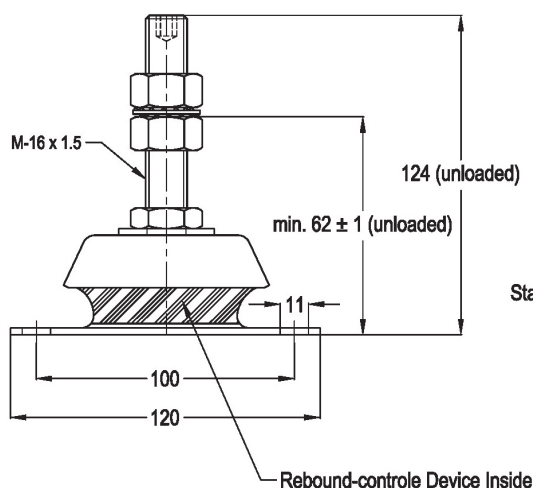

TOPVIEW

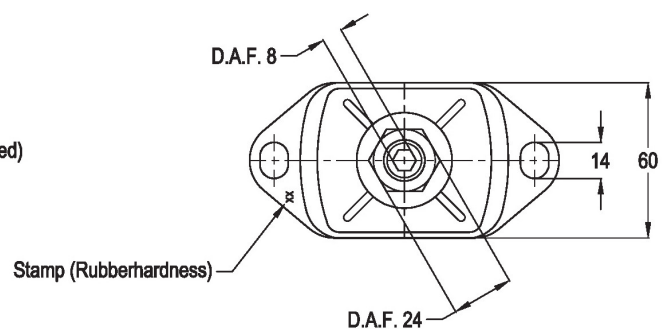




IM-Mounting

type 10-IM-350-A


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS

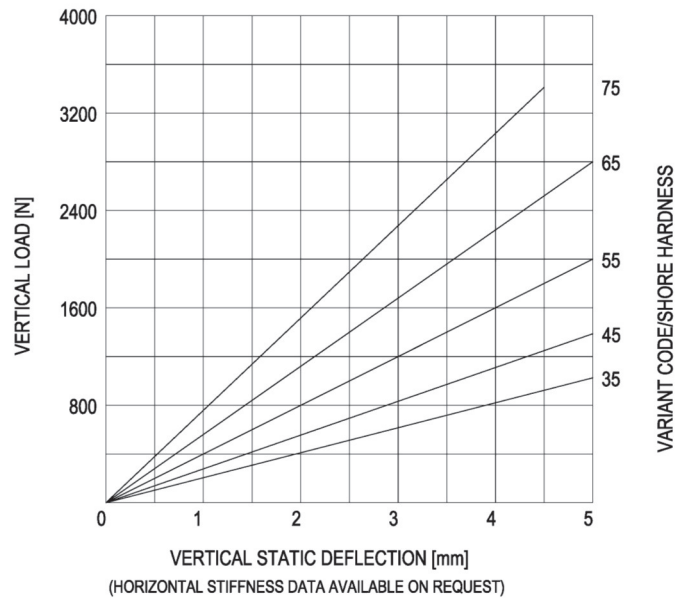

SIDEVIEW

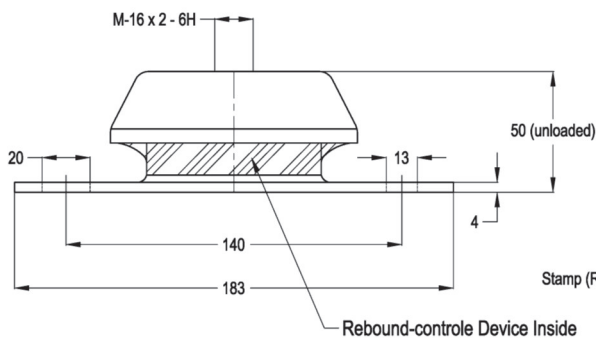

TOPVIEW

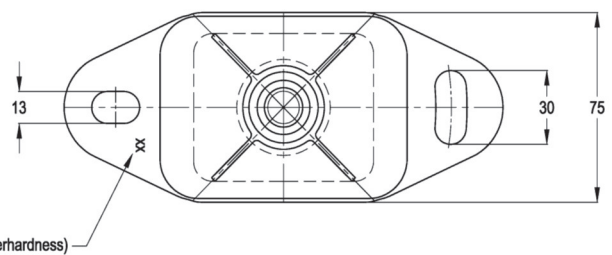



IM-Mounting

type 10-IM-350-B



Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS

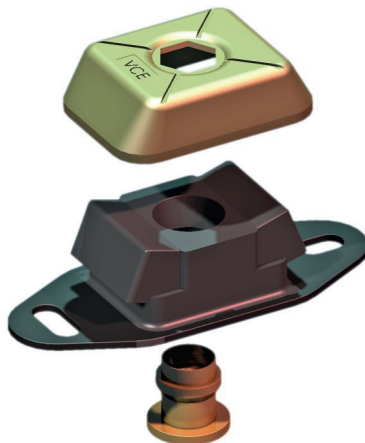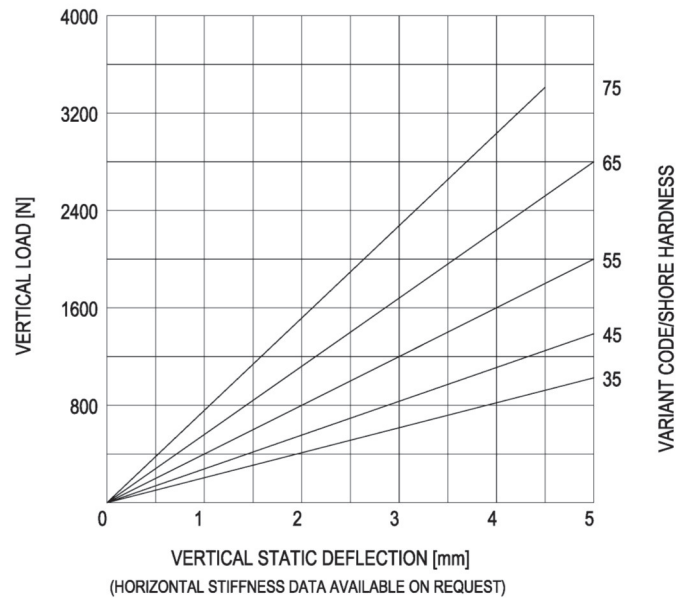

SIDEVIEW

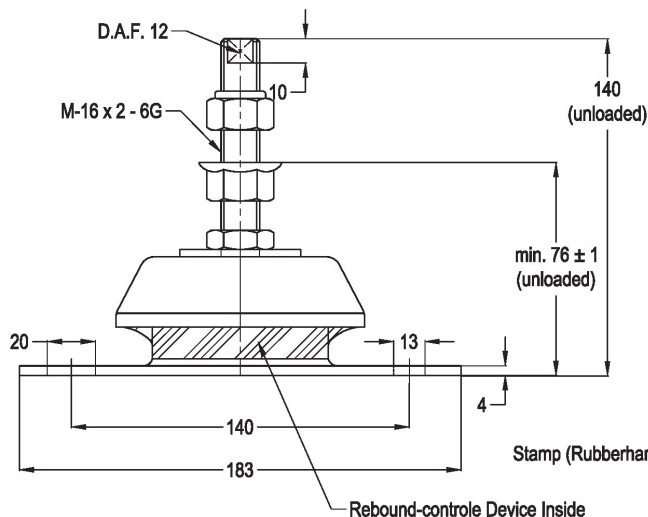

TOPVIEW

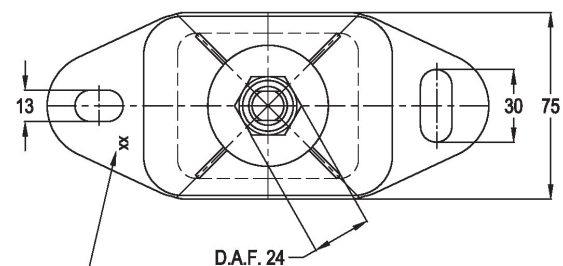




IM-Mounting

type 10-IM-350-C


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

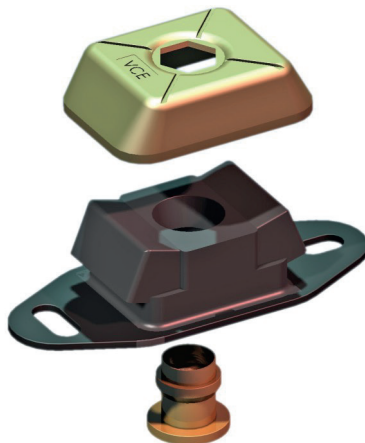


LOAD CHARACTERISTICS

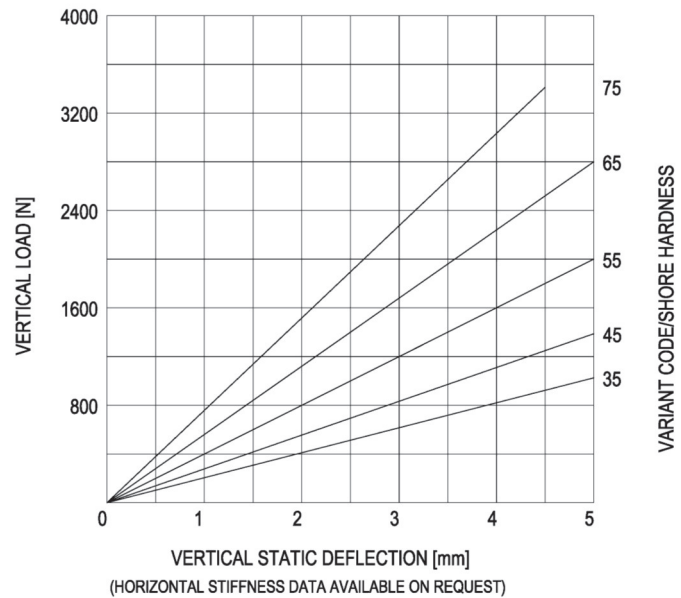

SIDEVIEW

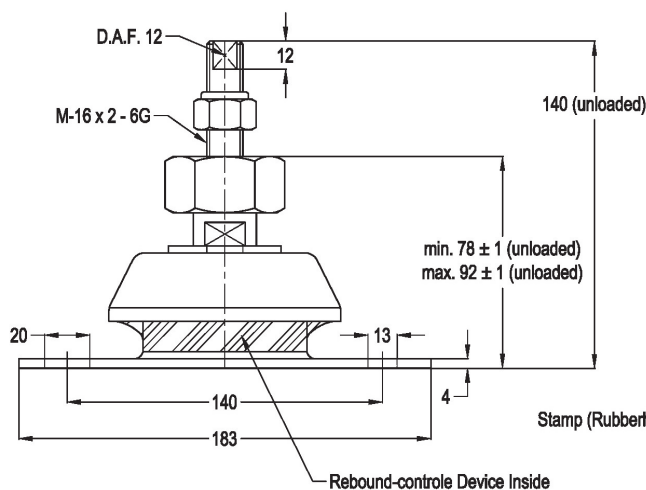

TOPVIEW

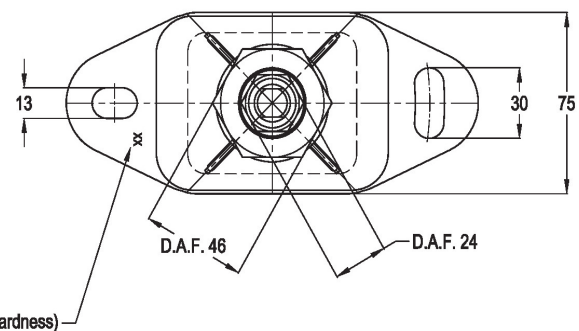



IM-Mounting

type 10-IM-350-D



Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS

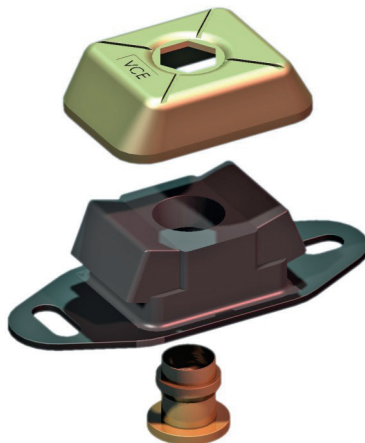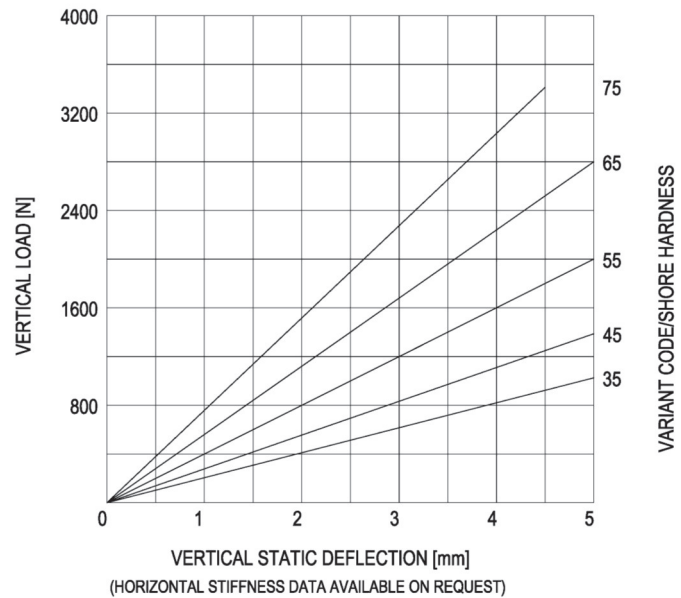

SIDEVIEW

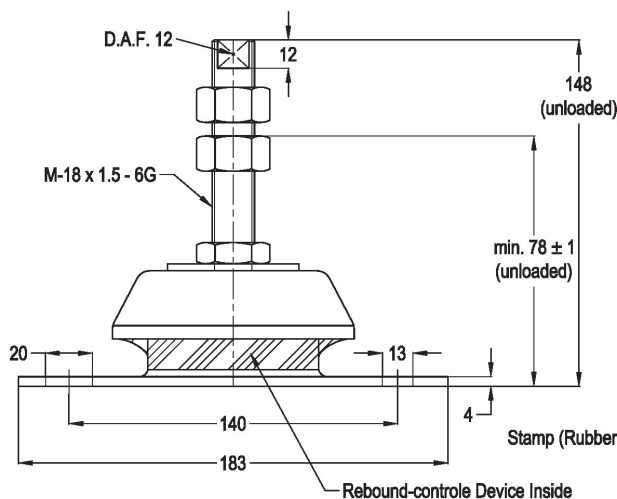

TOPVIEW

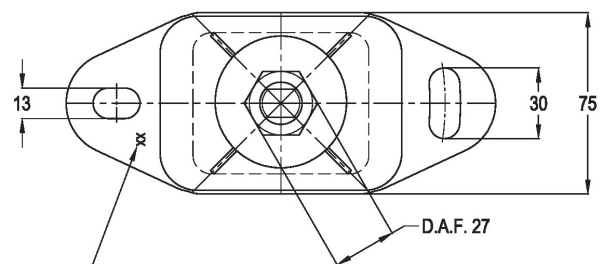



IM-Mounting type 10-IM-1000-A


Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




LOAD CHARACTERISTICS IM-1000

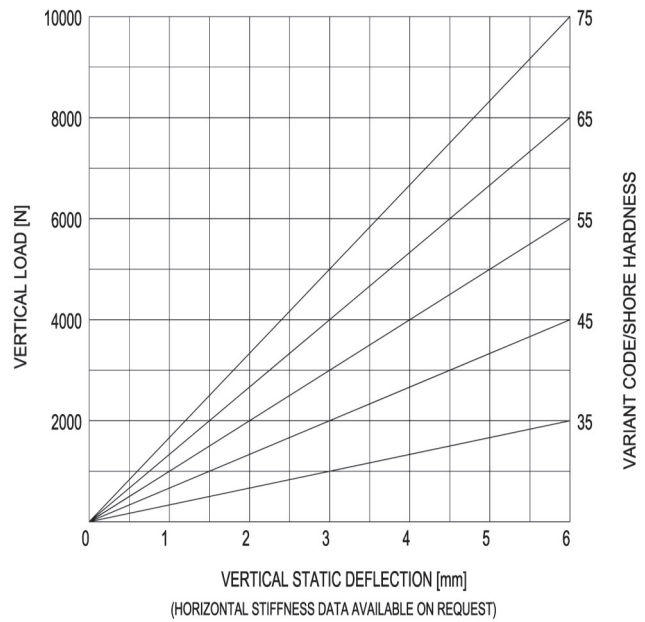

SIDEVIEW

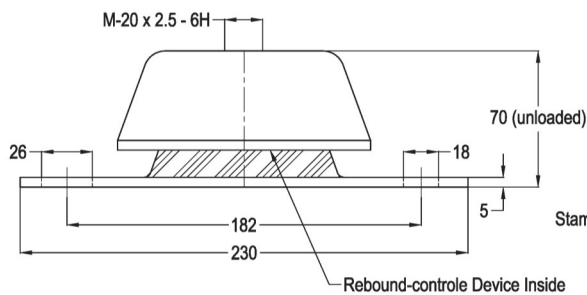

TOPVIEW

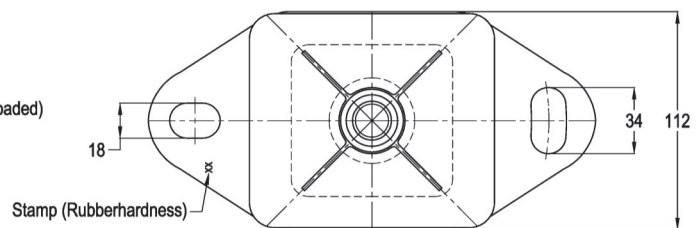




IM-Mounting

type 10-IM-1000-B


Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, genrator sets, pump units, compressor sets, etc.

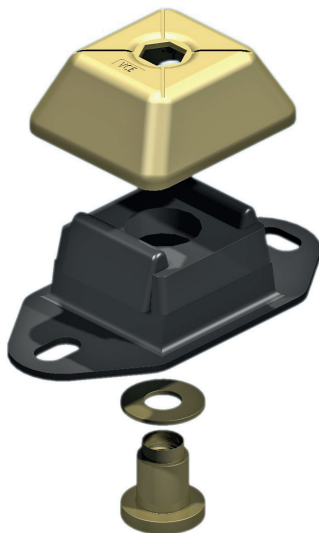


LOAD CHARACTERISTICS IM-1000

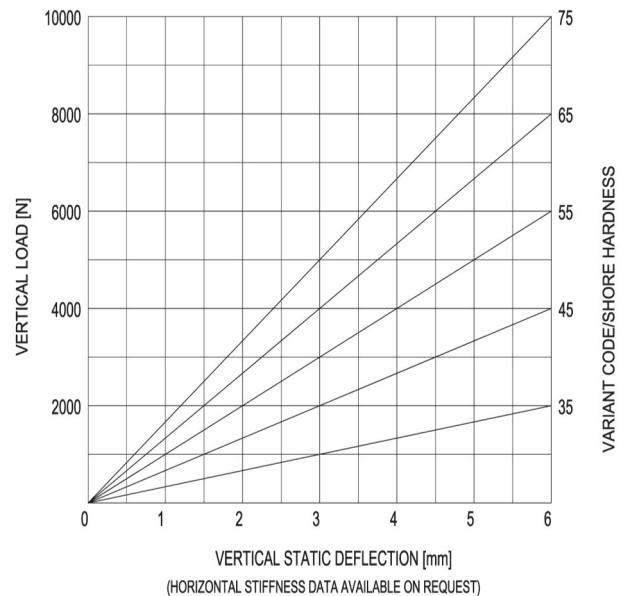

SIDEVIEW

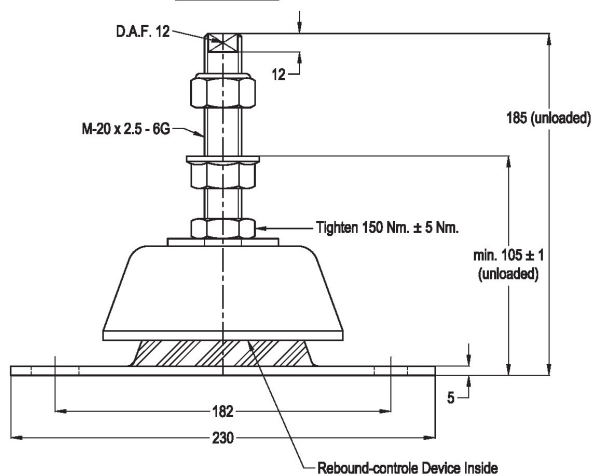

TOPVIEW

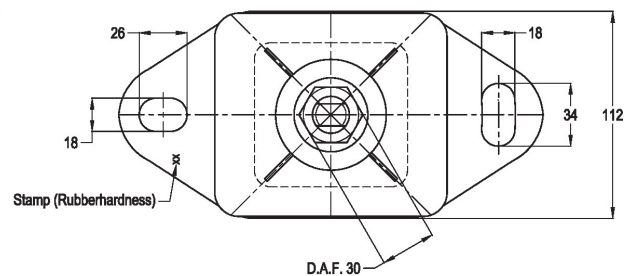



IM-Mounting

type 10-IM-1000-C





Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.



LOAD CHARACTERISTICS IM-1000

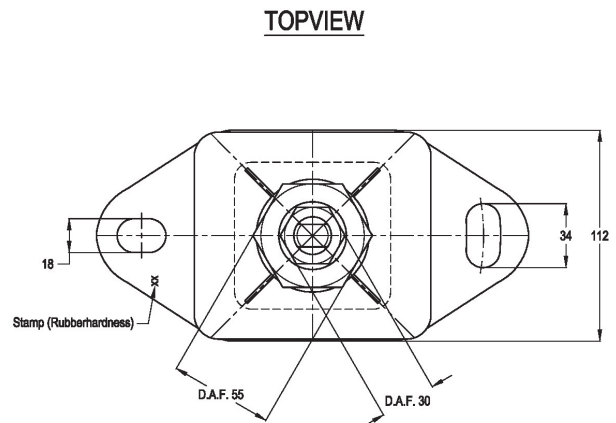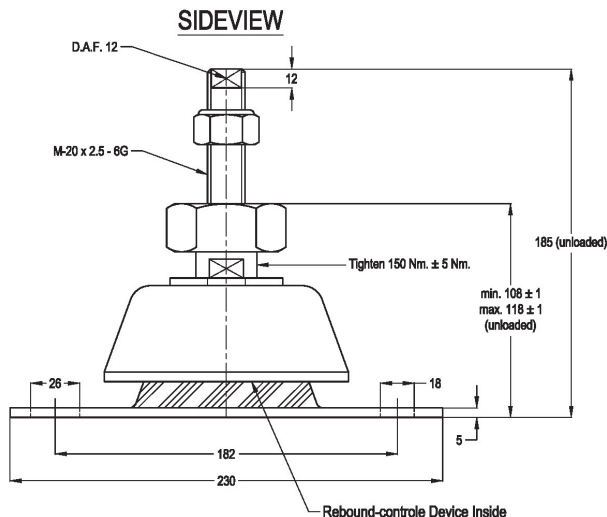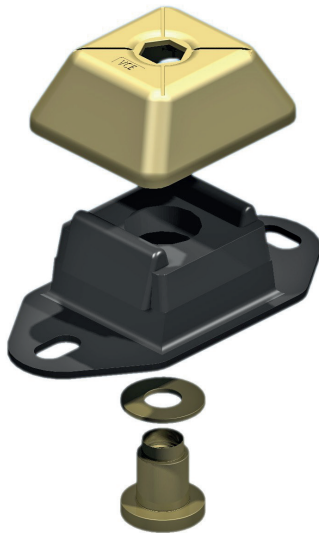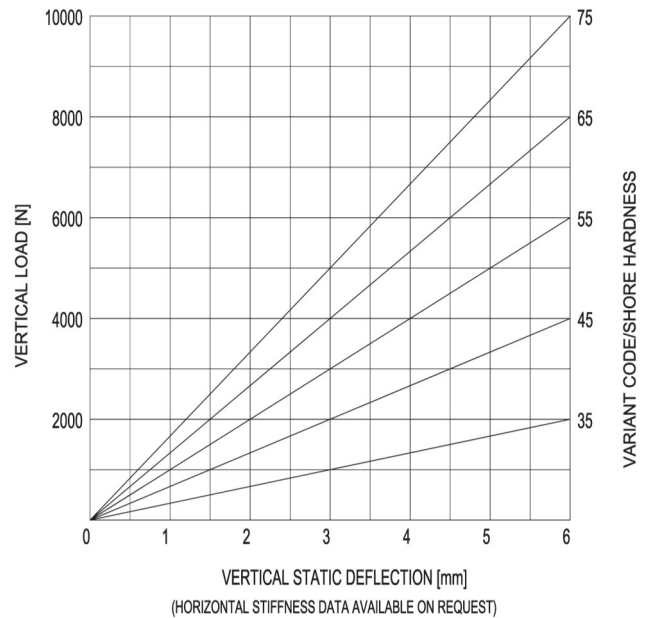




IM-Mounting

type 10-IM-1000-F




Max. 1000 kg - 6 mm - 6.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

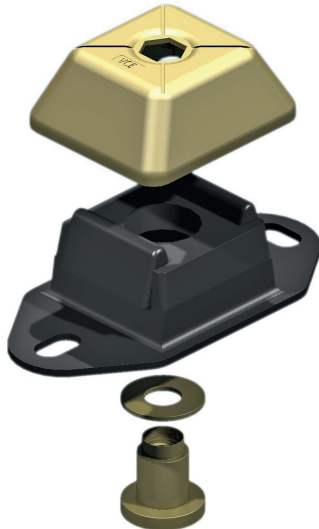

LOAD CHARACTERISTICS IM-1000

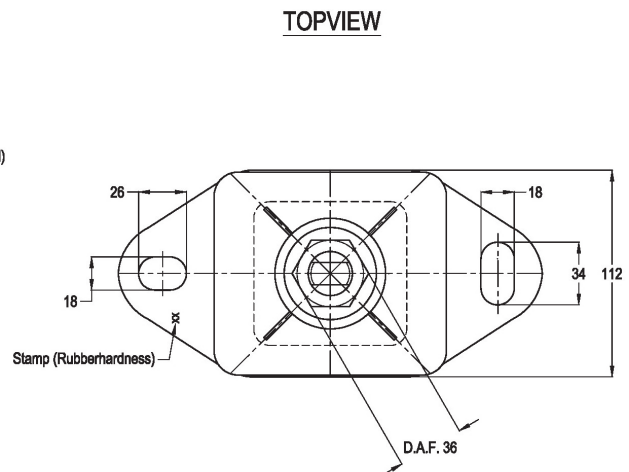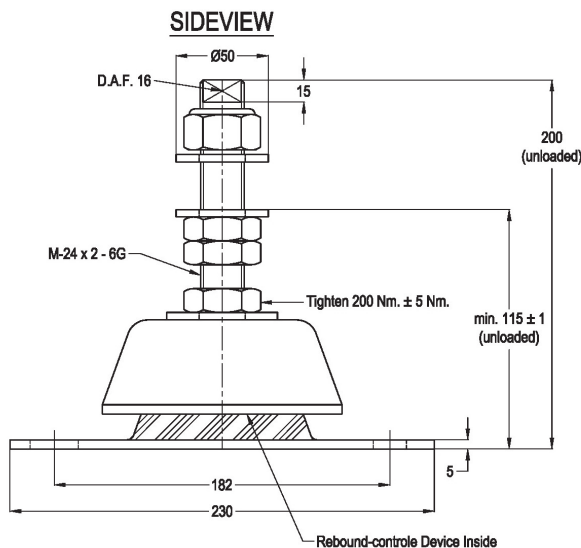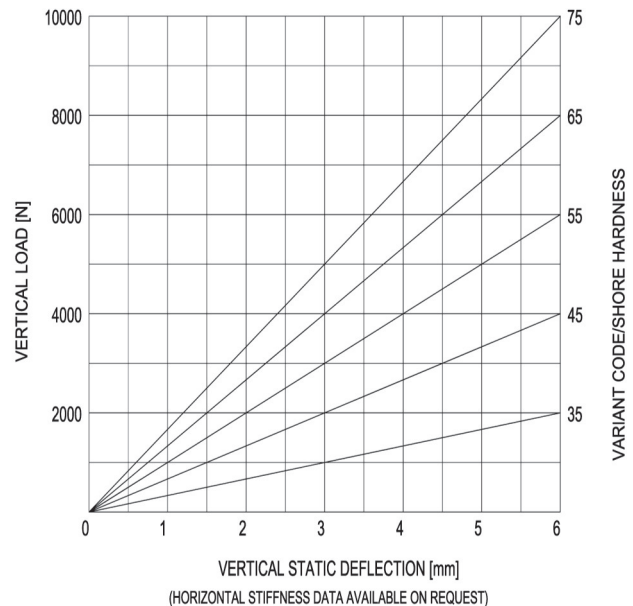





IM-Mounting

type 10-IM-2500-A


Max. 3000 kg - 8 mm - 5.5 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

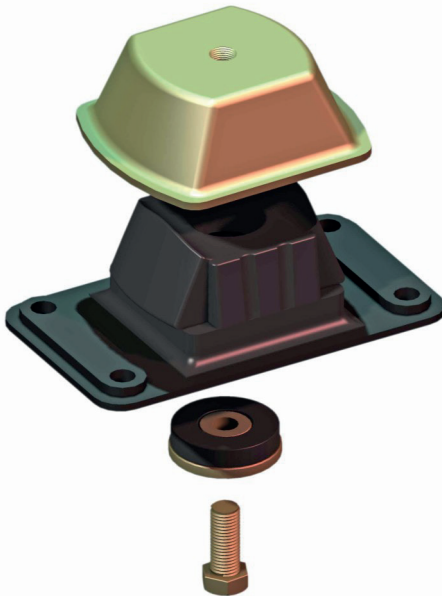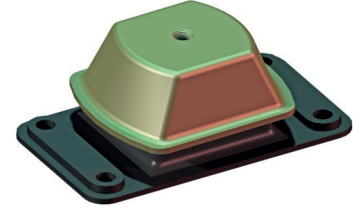


LOAD CHARACTERISTICS

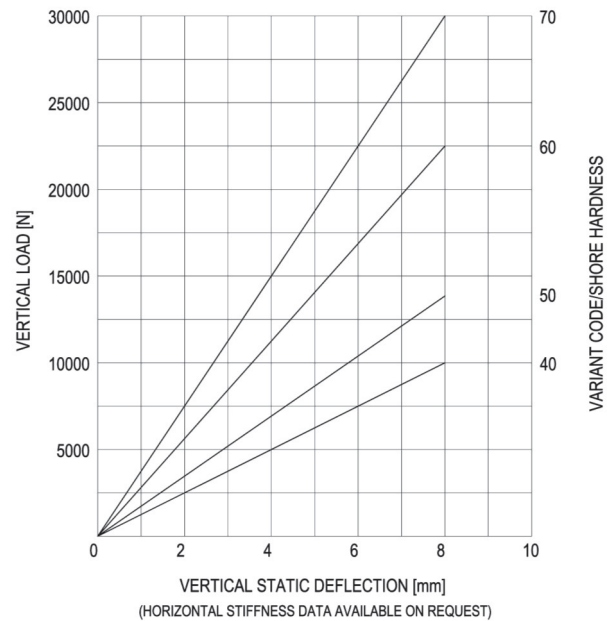

SIDE-VIEW

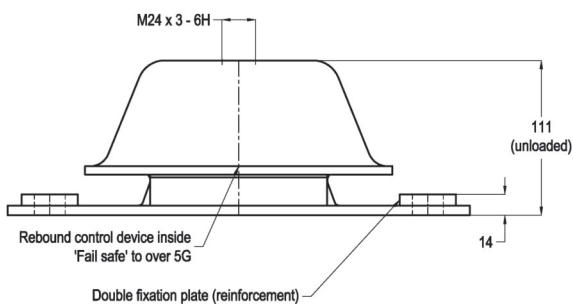

TOP-VIEW

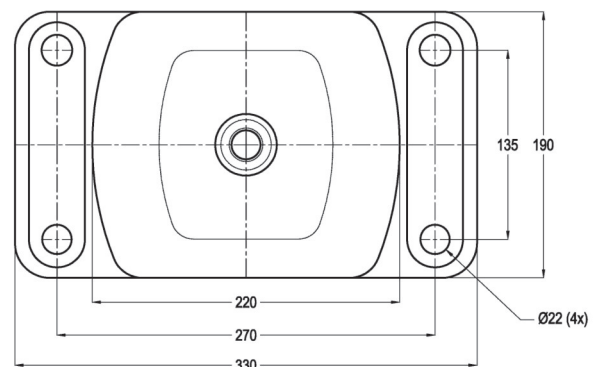




FFP-Mounting


type 20-FFP-1

Max. 350 kg - 5 mm - 7 Hz


FFP-type Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-1 elements are also available with M12 inner thread and in SS-316 stainless steel. Customers are recommended to contact our application engineers for further technical information on products and applications.




Applications: supporting and stabilizing pipe sections and exhaust systems.

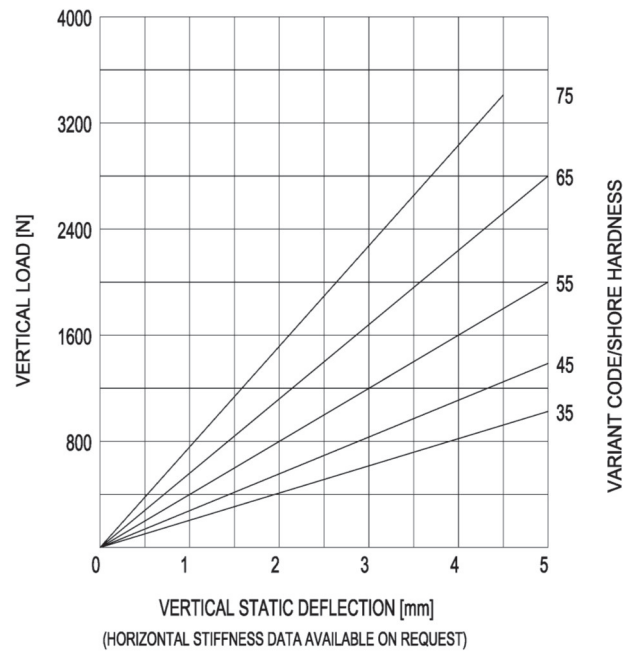

SIDEVIEW

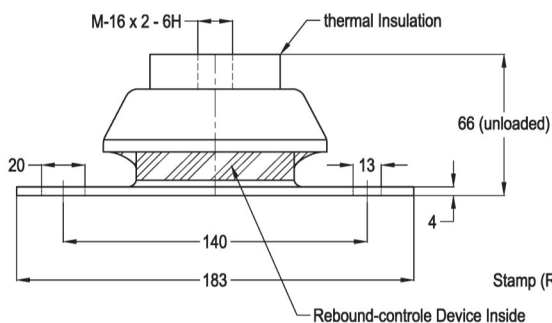

TOPVIEW

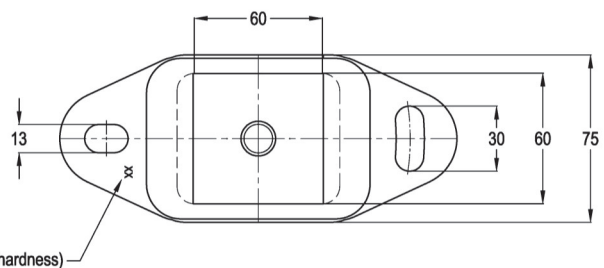





FFP-Mounting

type 20-FFP-2


Max. 550 kg - 5 mm - 7 Hz

FFP-type Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-2 elements are also available with M16 and M12 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

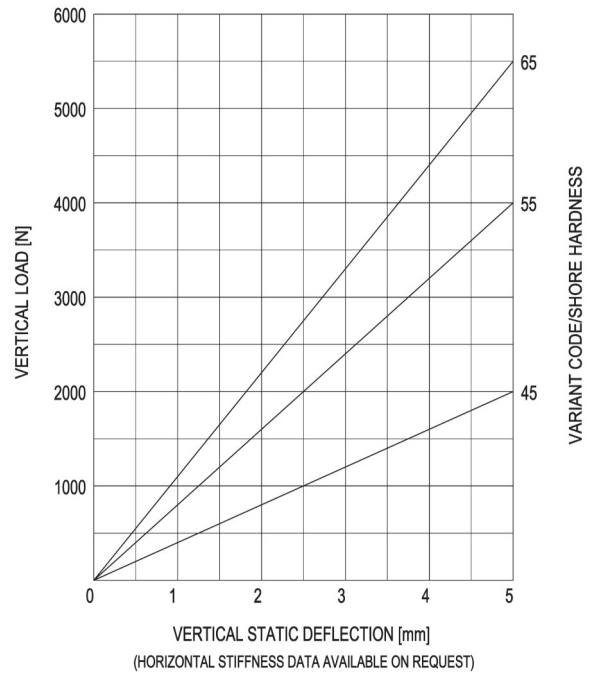

SIDEVIEW

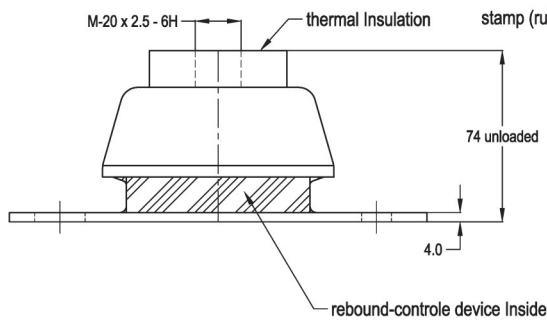

TOP-VIEW

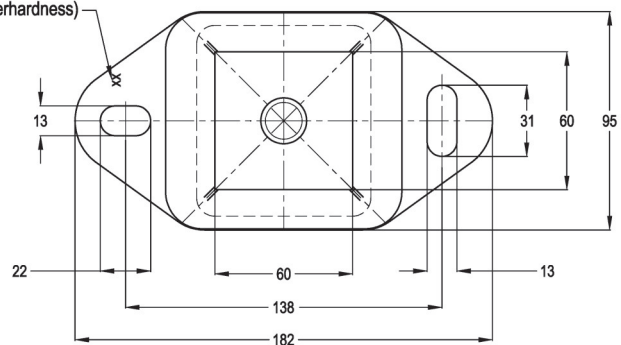




FFP-Mounting

type 20-FFP-3


Max. 1000 kg - 6 mm - 6.5 Hz

FFP-type Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-3 elements are also available with M16 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

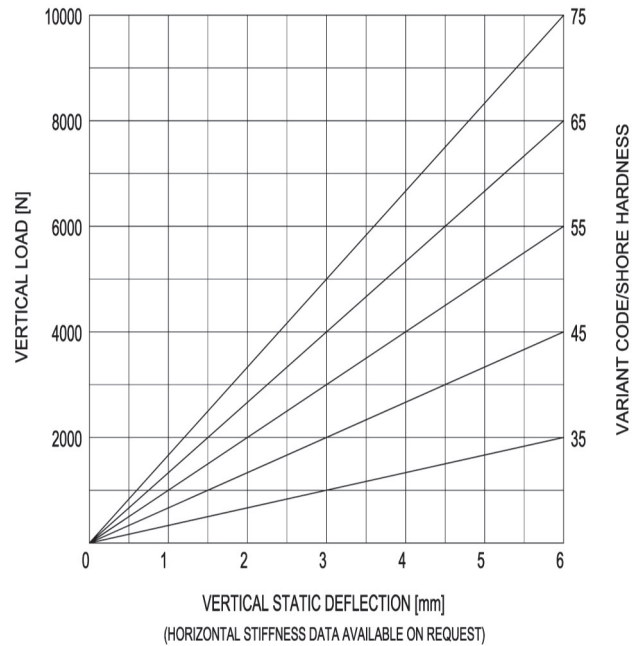

SIDEVIEW

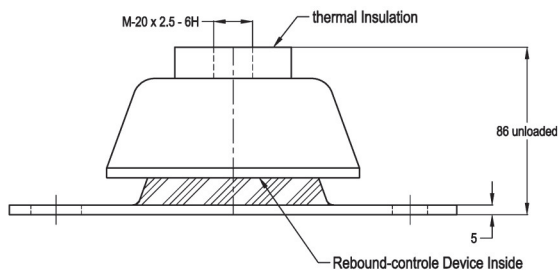

TOPVIEW

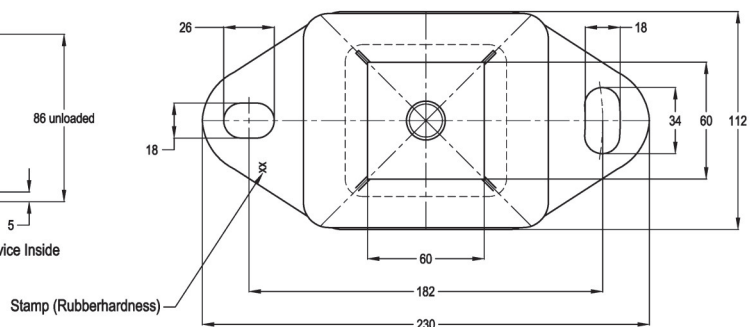




FFP-Mounting

type 20-FFP-4


Max. 1000 kg - 10 mm - 5 Hz

FFP-type Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-4 elements are also available with M20 and M12 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

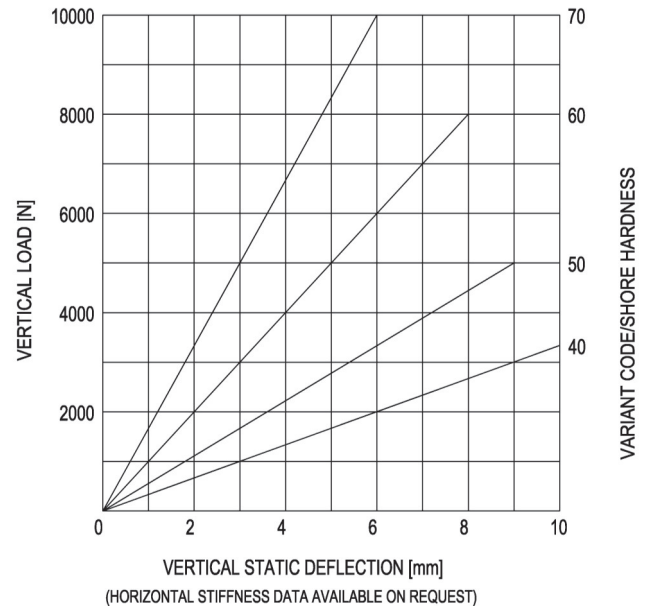

SIDE-VIEW

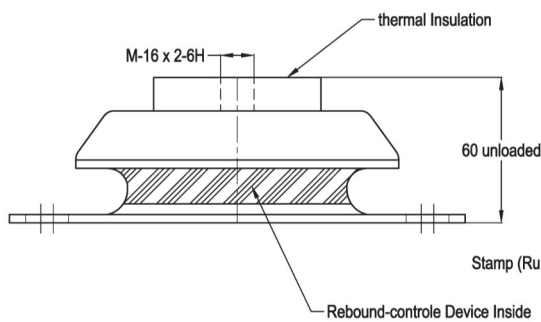

TOP-VIEW

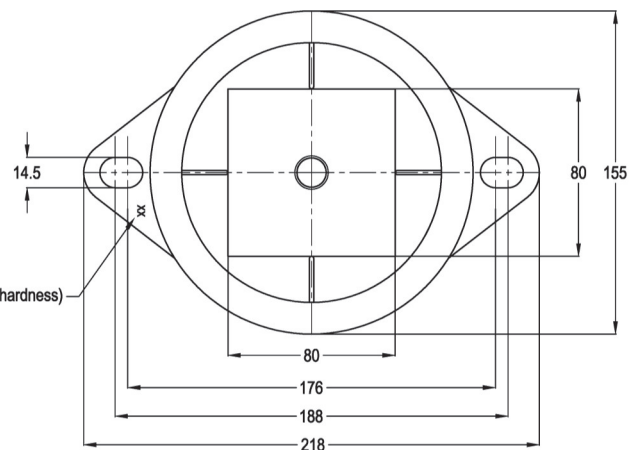





FFP-Mounting

type 20-FFP-5


Max. 3000 kg - 8 mm - 5.5 Hz

FFP-type Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-5 elements are also available with M16 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

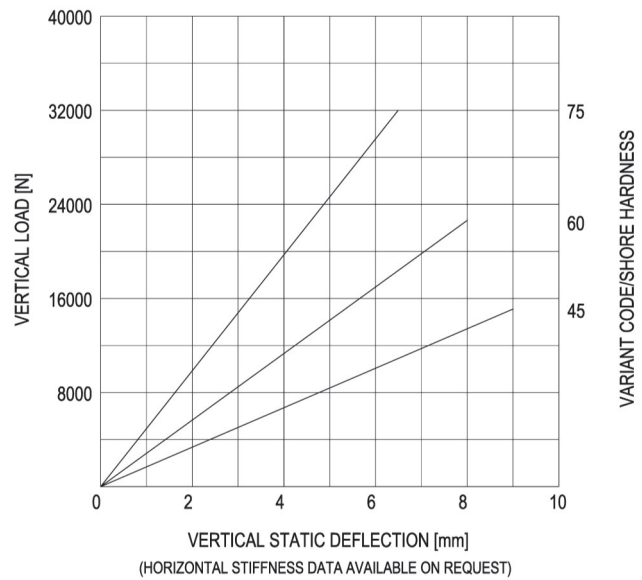

SIDE-VIEW

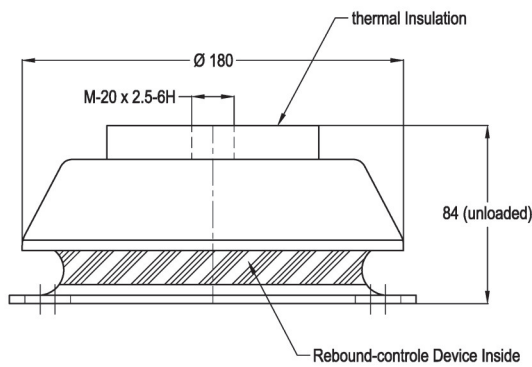

TOPVIEW

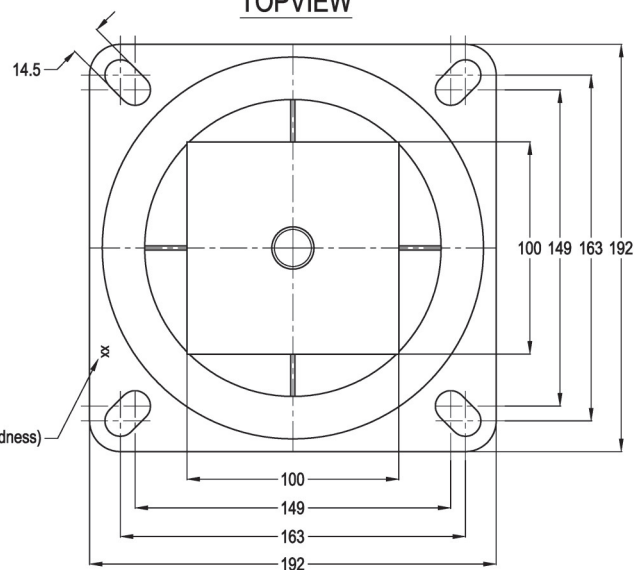





FFP-Mounting

type 20-FFP-6


Max. 4000 kg - 8 mm - 5.5 Hz

FFP-type Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. Customers are recommended to contact our application engineers for further technical information on products and applications.

Applications: supporting and stabilizing pipe sections and exhaust systems.

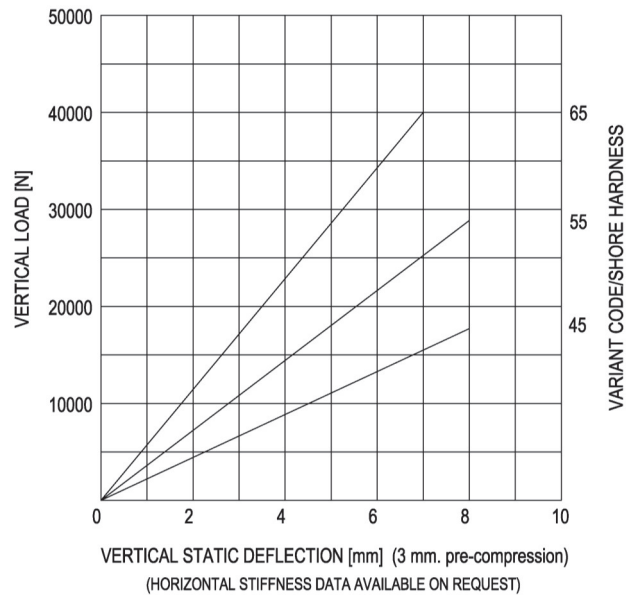

SIDE-VIEW

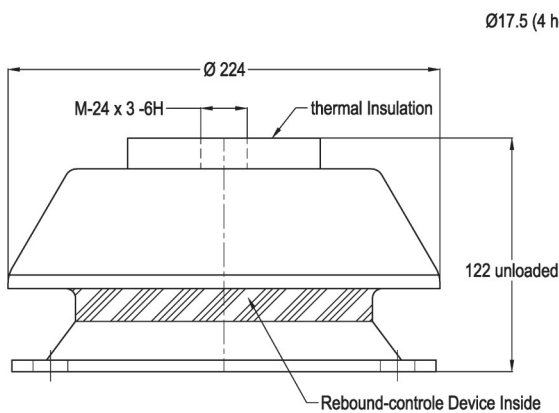

TOPVIEW

