




**SILENT LINE**  
LEADING INNOVATION



THE SOUND OF  
**SILENCE**

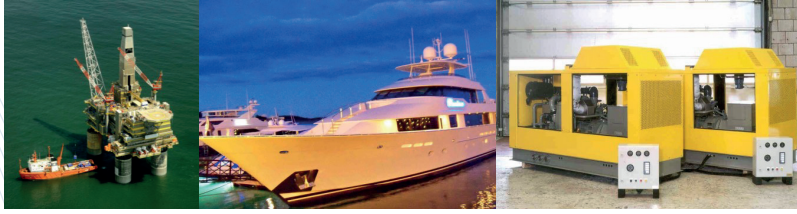



## IM-Mounting

type 10-IM-130-A


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

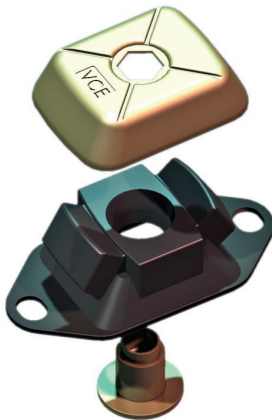


### LOAD CHARACTERISTICS

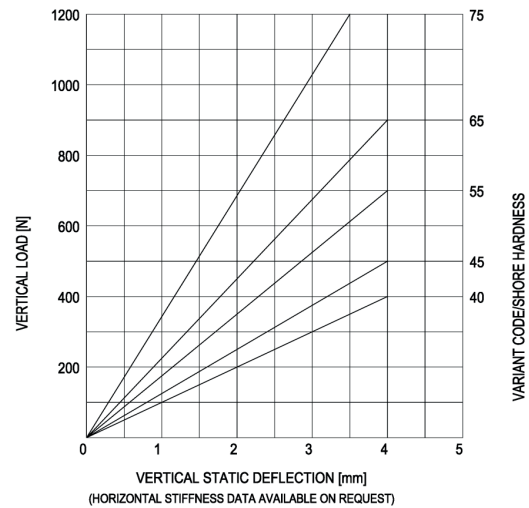

### SIDEVIEW

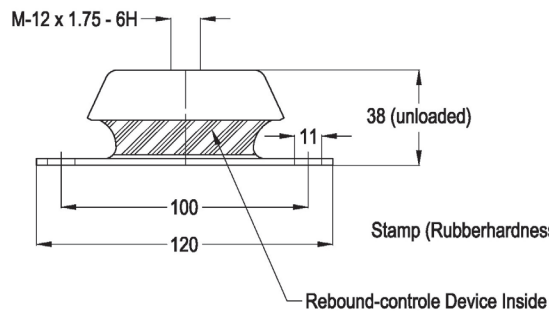

### TOPVIEW

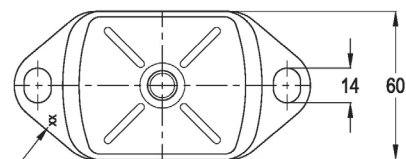





## IM-Mounting

type 10-IM-130-B


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

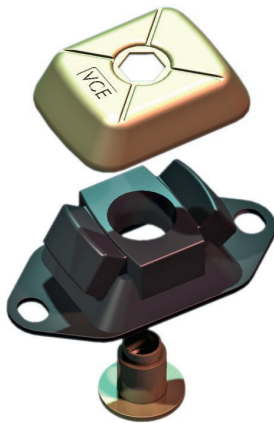


### LOAD CHARACTERISTICS

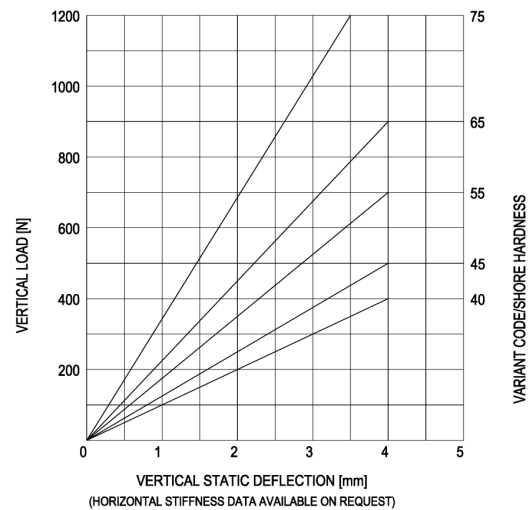

### SIDEVIEW

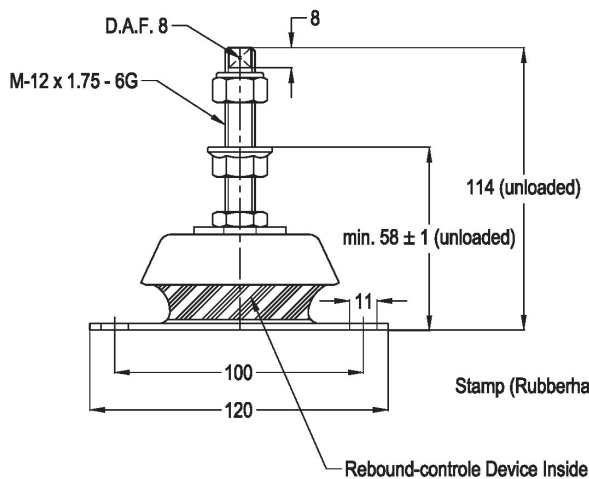

### TOPVIEW

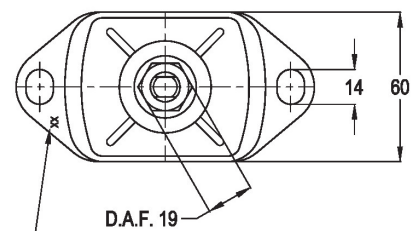



**SILENT LINE**  
LEADING INNOVATION



THE SOUND OF  
**SILENCE**





## IM-Mounting

type 10-IM-130-C


Max. 120 kg - 4 mm - 8 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

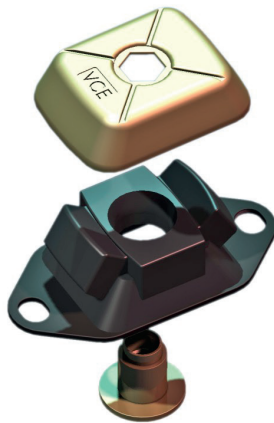


### LOAD CHARACTERISTICS

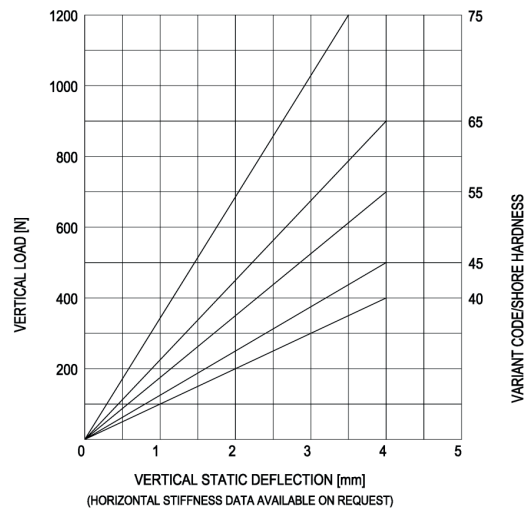

### SIDEVIEW

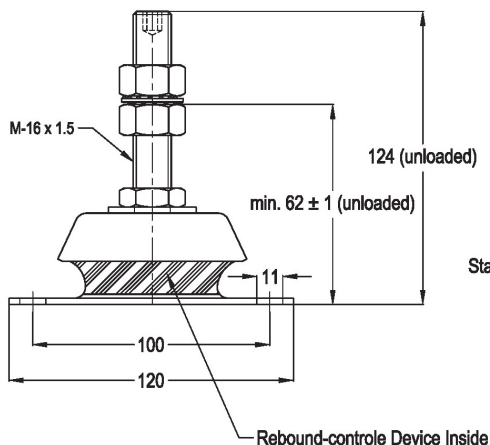

### TOPVIEW

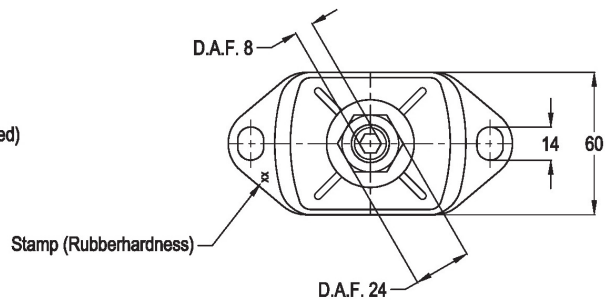





**SILENT LINE**  
LEADING INNOVATION



THE SOUND OF  
**SILENCE**




## IM-Mounting

type 10-IM-350-A


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

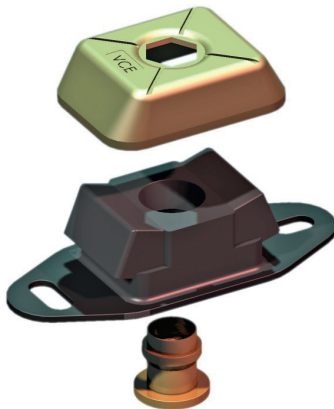


### LOAD CHARACTERISTICS

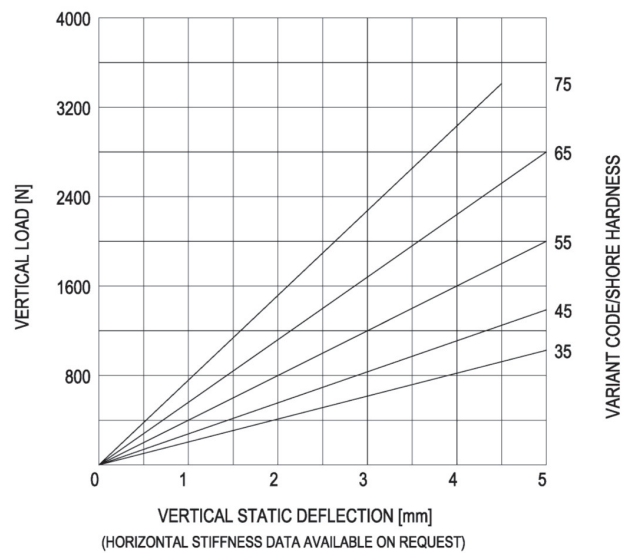

### SIDEVIEW

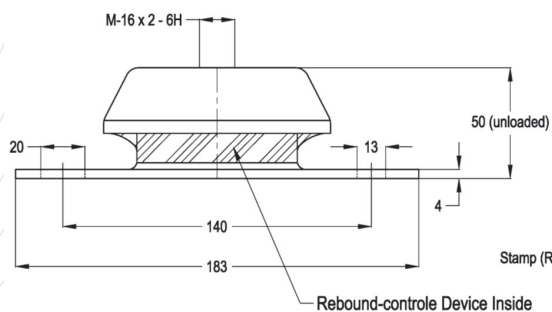

### TOPVIEW

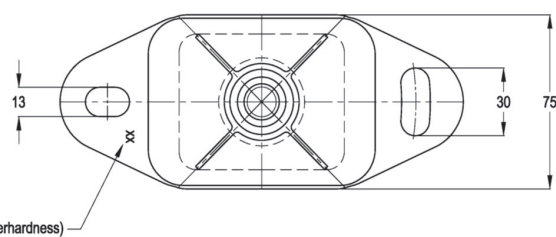




## IM-Mounting

type 10-IM-350-B


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

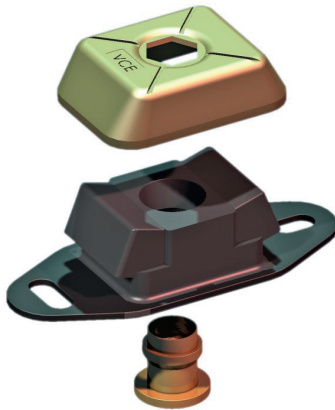


### LOAD CHARACTERISTICS

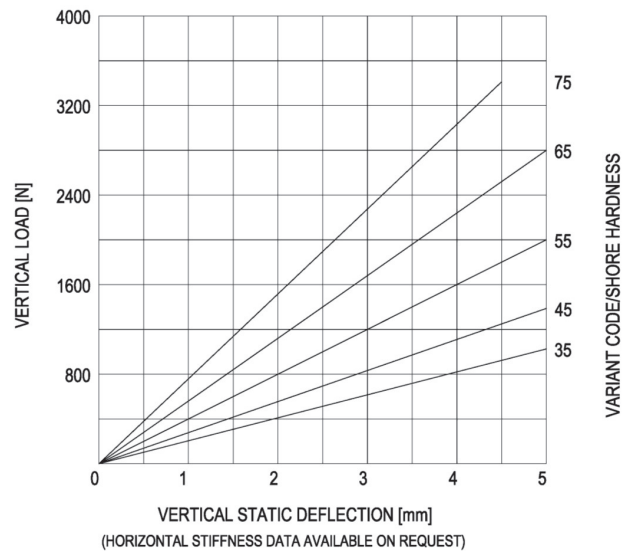

### SIDEVIEW

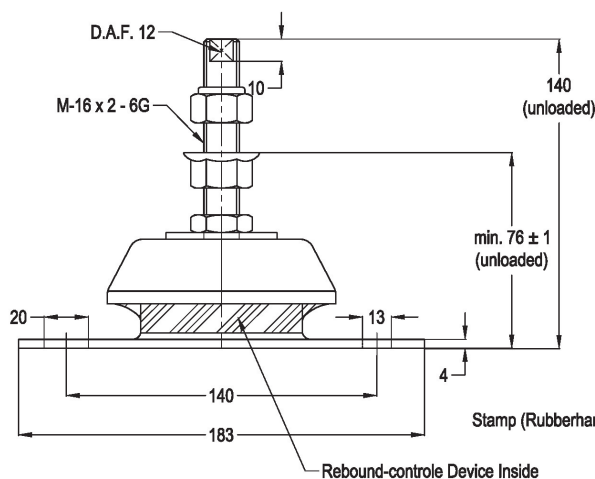

### TOPVIEW

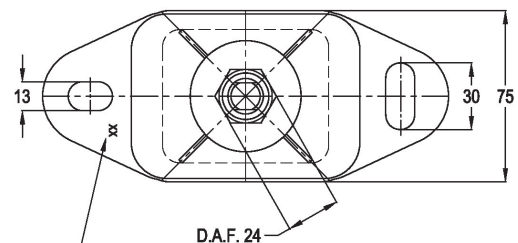




## IM-Mounting

type 10-IM-350-C


Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

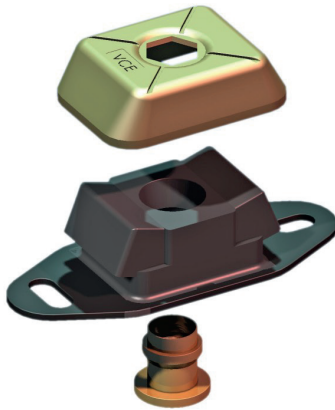


### LOAD CHARACTERISTICS

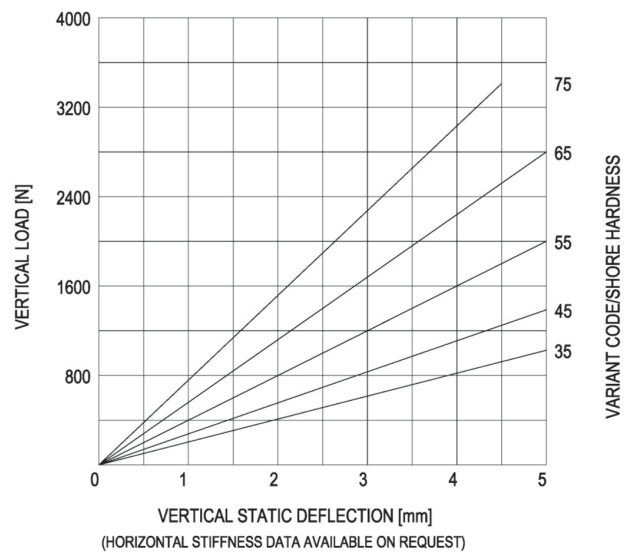

### SIDEVIEW

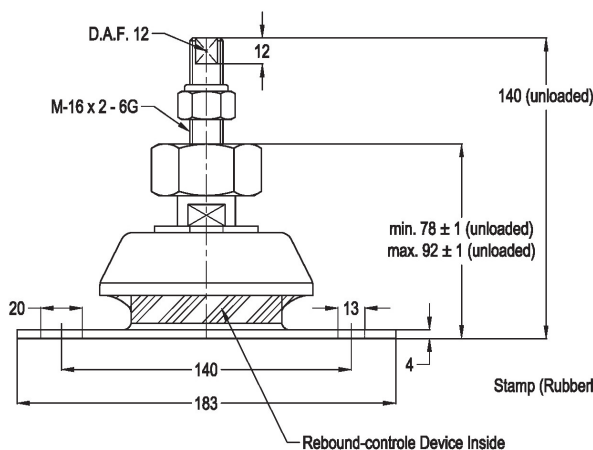

### TOPVIEW

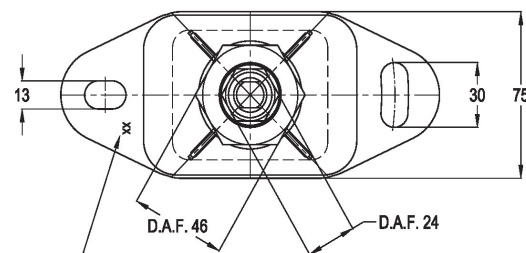





**SILENT LINE**  
LEADING INNOVATION



THE SOUND OF  
**SILENCE**




## IM-Mounting

type 10-IM-350-D



Max. 350 kg - 5 mm - 7 Hz

IM-Mountings are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




### LOAD CHARACTERISTICS

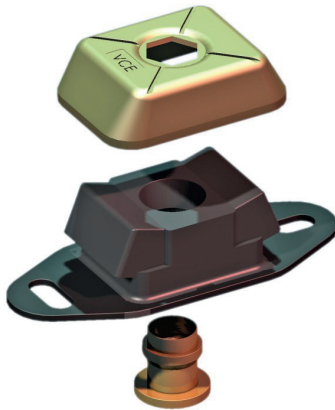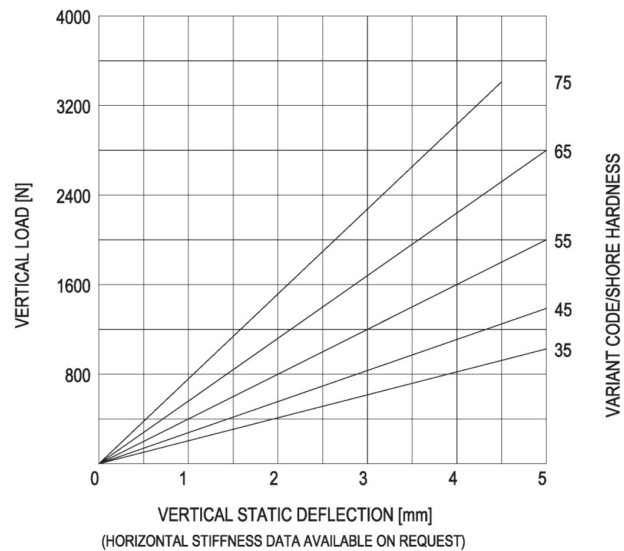

### SIDEVIEW

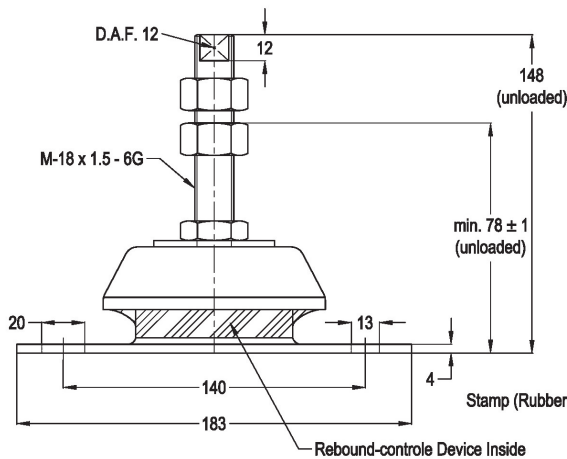

### TOPVIEW

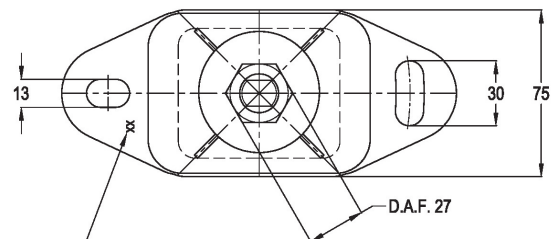




**SILENT LINE**  
LEADING INNOVATION



THE SOUND OF  
**SILENCE**

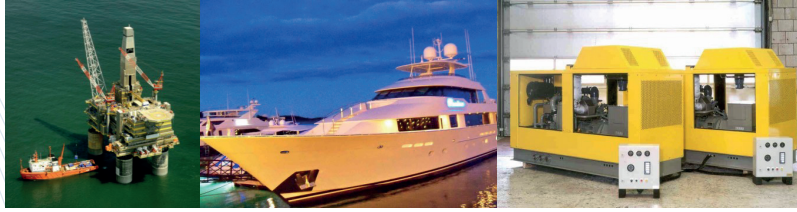



**IM-Mounting**  
**type 10-IM-1000-A**  
Max. 1000 kg - 6 mm - 6.5 Hz

**IM-Mountings** are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




#### LOAD CHARACTERISTICS IM-1000

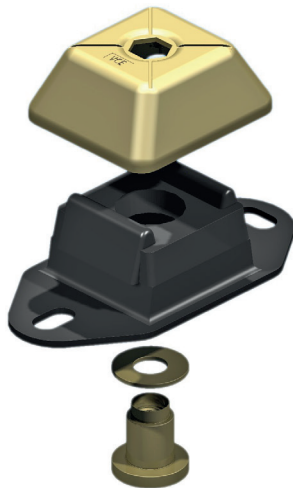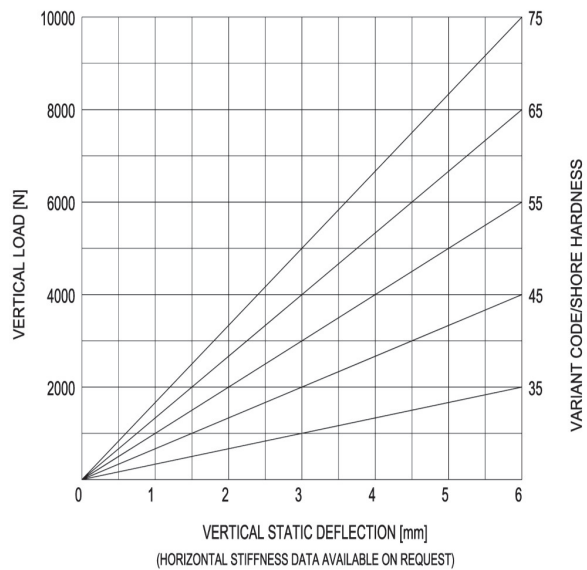

#### SIDEVIEW

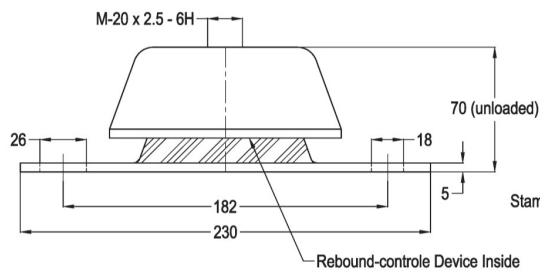

#### TOPVIEW

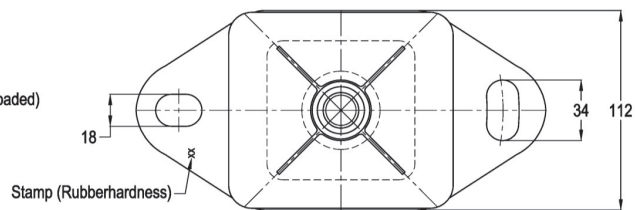





**SILENT LINE**  
LEADING INNOVATION



THE SOUND OF  
**SILENCE**



## IM-Mounting

type 10-IM-1000-B



Max. 1000 kg - 6 mm - 6.5 Hz

**IM-Mountings** are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




### LOAD CHARACTERISTICS IM-1000

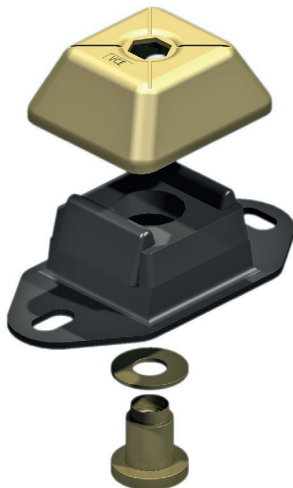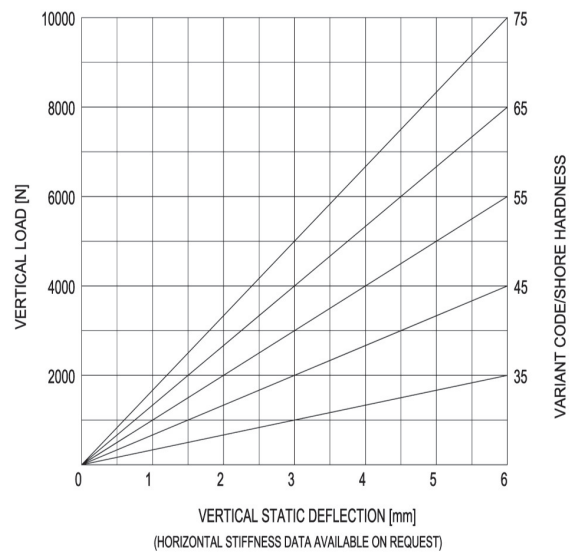

#### SIDEVIEW

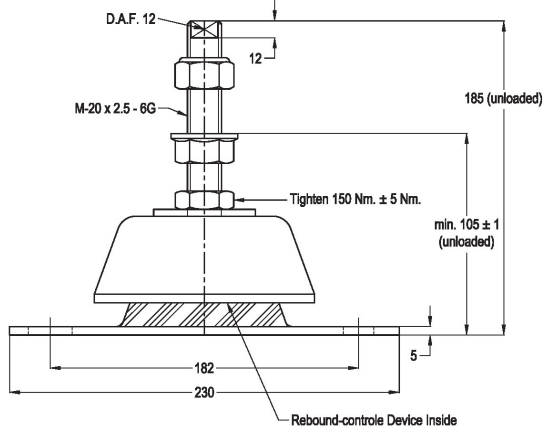

#### TOPVIEW

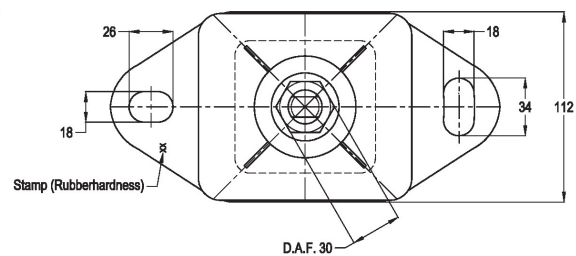







**IM-Mounting**  
**type 10-IM-1000-C**  
Max. 1000 kg - 6 mm - 6.5 Hz

**IM-Mountings** are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.

Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.



#### LOAD CHARACTERISTICS IM-1000

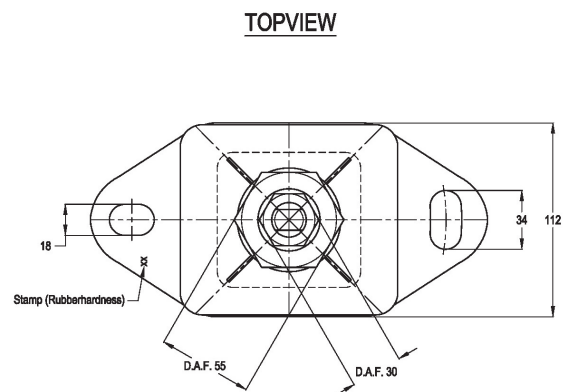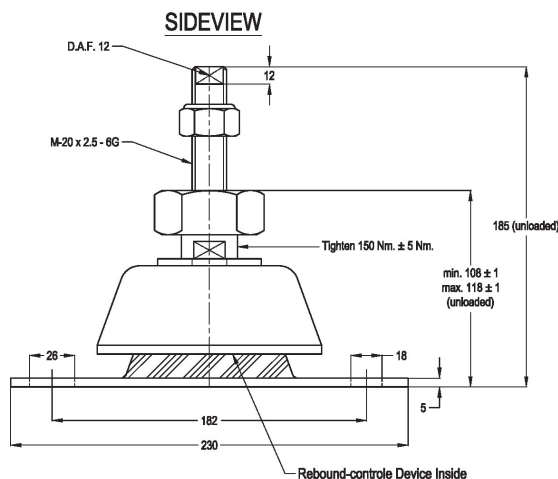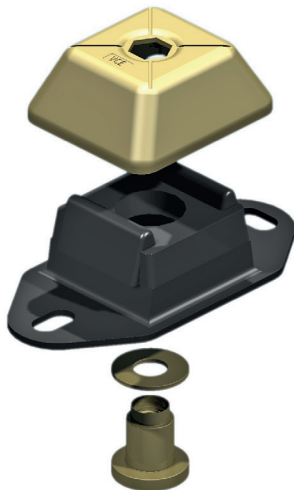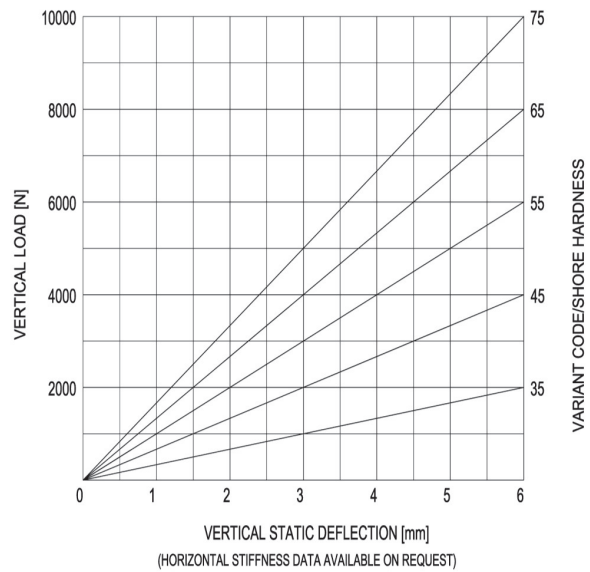




## IM-Mounting type 10-IM-1000-F Max. 1000 kg - 6 mm - 6.5 Hz

**IM-Mountings** are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.




### LOAD CHARACTERISTICS IM-1000

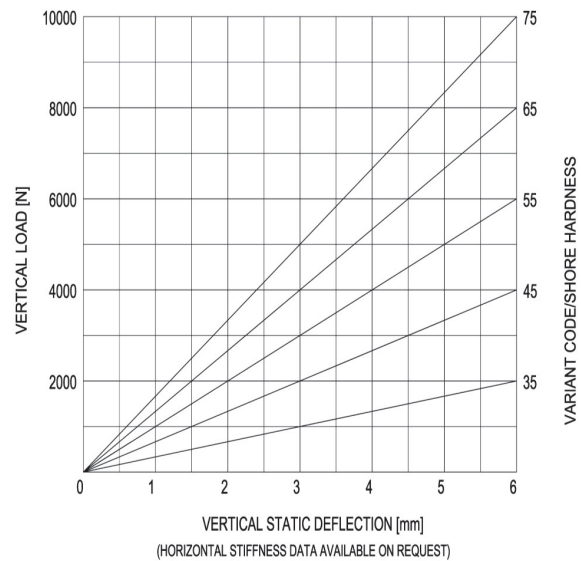

### SIDEVIEW

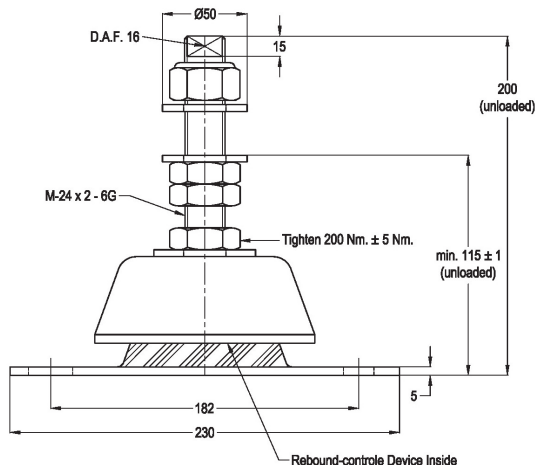

### TOPVIEW

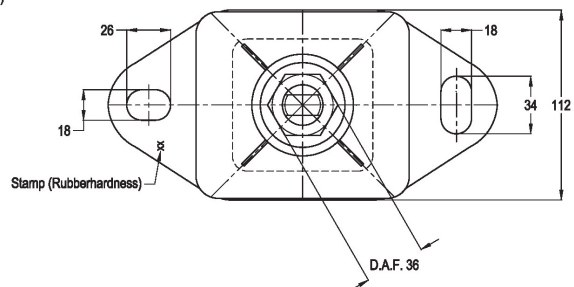







## IM-Mounting type 10-IM-2500-A


Max. 3000 kg - 8 mm - 5.5 Hz

**IM-Mountings** are very suitable for mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration insulation. The integrated rebound control-device limits excessive movement under shock loads. IM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature.


Applications: marine propulsion-engines, generator sets, pump units, compressor sets, etc.

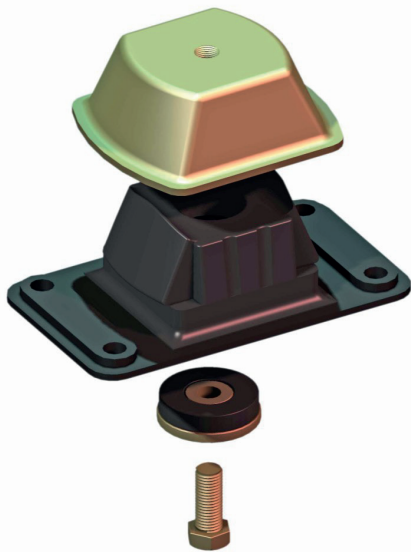


### LOAD CHARACTERISTICS

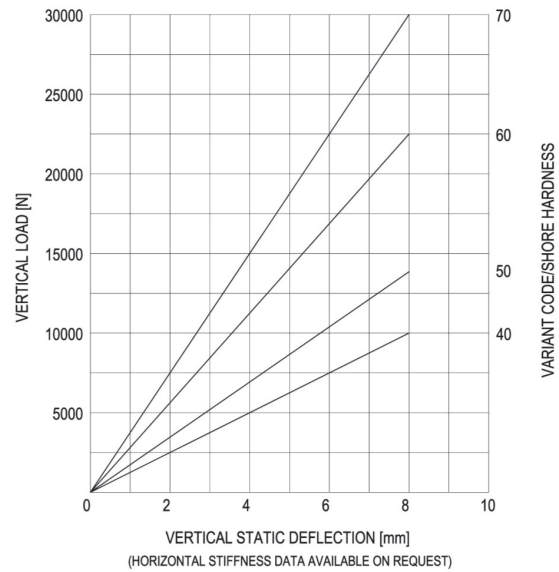

### SIDE-VIEW

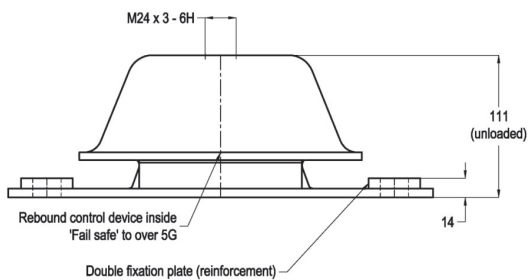

### TOP-VIEW

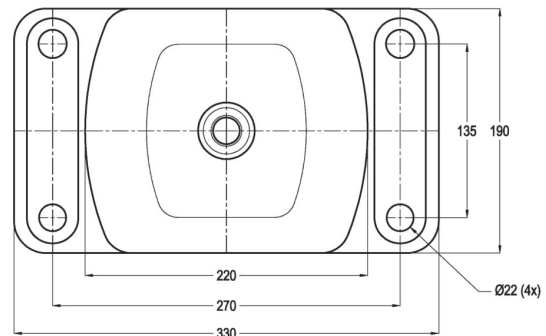




## FFP-Mounting

### type 20-FFP-1


Max. 350 kg - 5 mm - 7 Hz

**FFP-type** Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-1 elements are also available with M12 inner thread and in SS-316 stainless steel. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

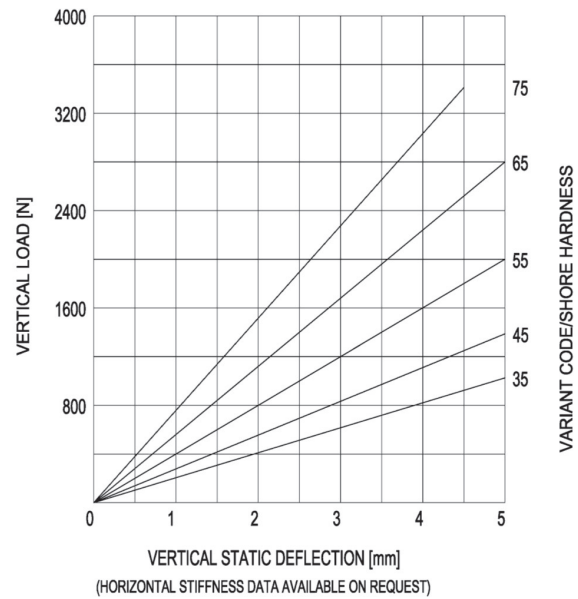

#### SIDEVIEW

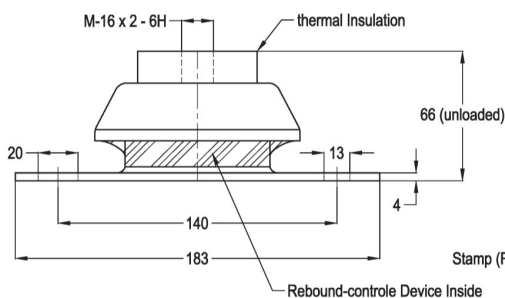

#### TOPVIEW

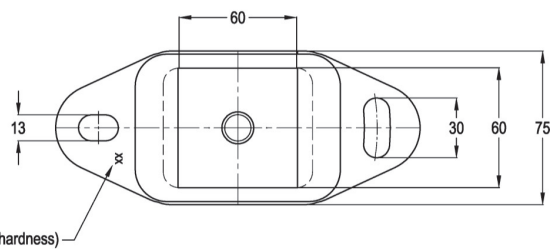





## FFP-Mounting

### type 20-FFP-2


Max. 550 kg - 5 mm - 7 Hz

**FFP-type** Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-2 elements are also available with M16 and M12 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

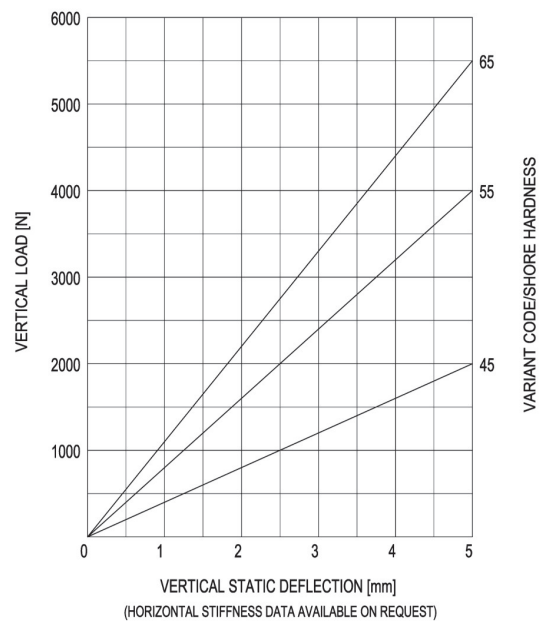

#### SIDEVIEW

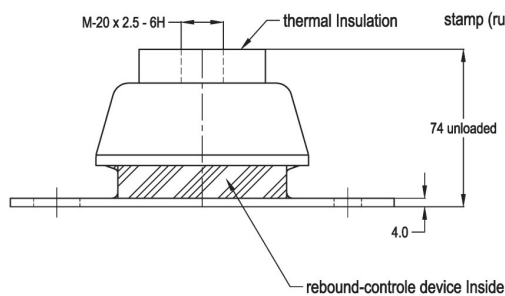

#### TOP-VIEW

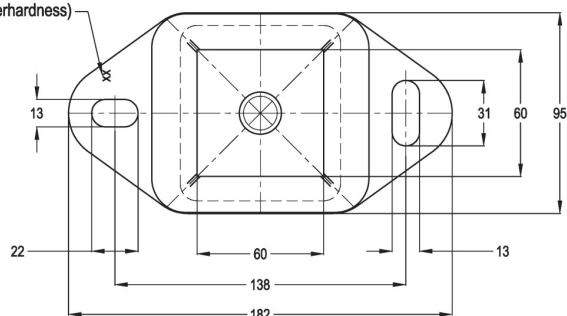







## FFP-Mounting

### type 20-FFP-3


Max. 1000 kg - 6 mm - 6.5 Hz

**FFP-type** Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-3 elements are also available with M16 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

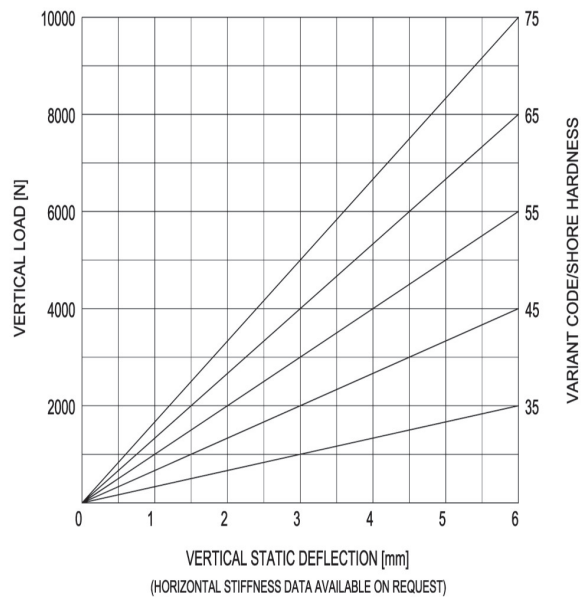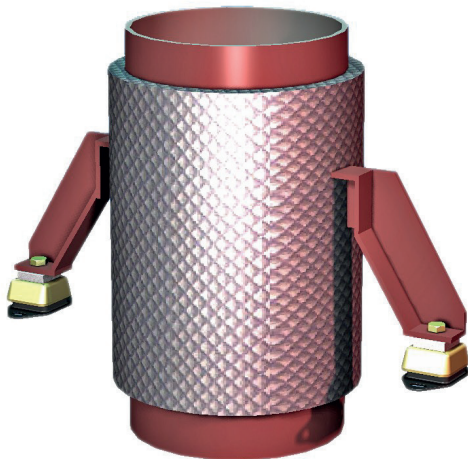

**SIDEVIEW**

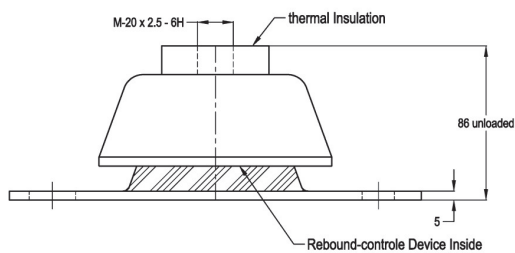

**TOPVIEW**

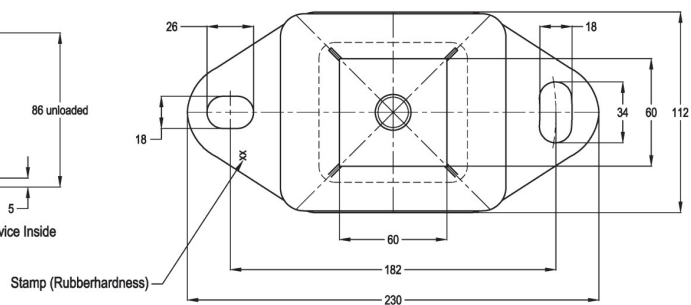




## FFP-Mounting

### type 20-FFP-4



Max. 1000 kg - 10 mm - 5 Hz

**FFP-type** Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-4 elements are also available with M20 and M12 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

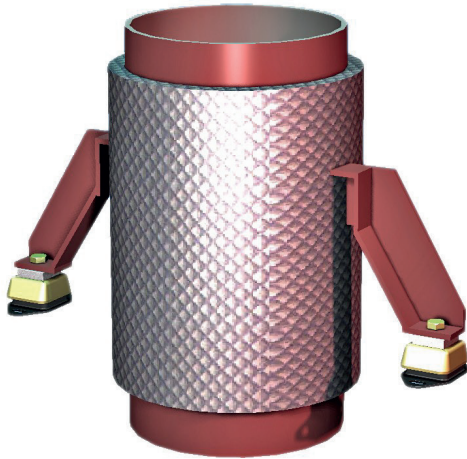

SIDE-VIEW

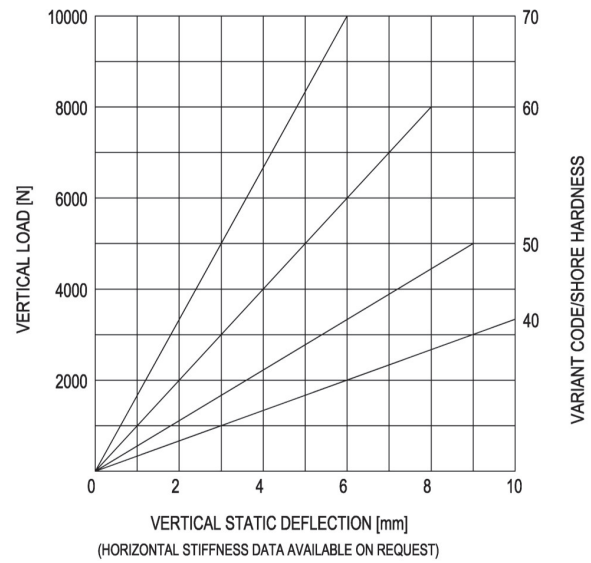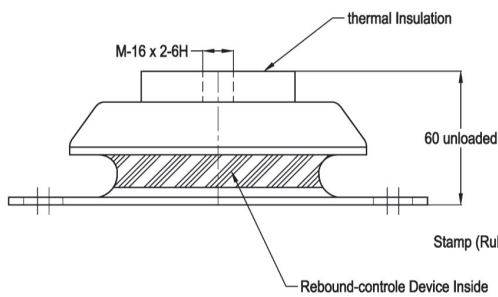

TOP-VIEW

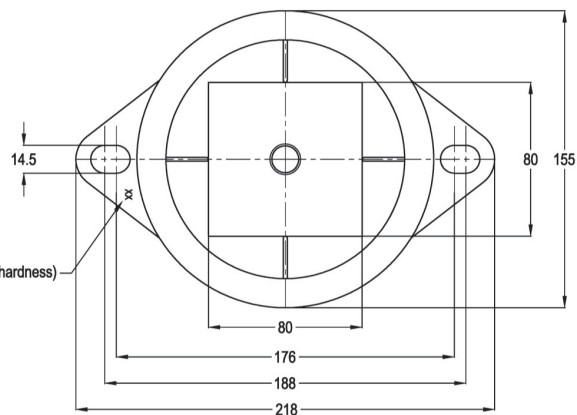





## FFP-Mounting

### type 20-FFP-5


Max. 3000 kg - 8 mm - 5.5 Hz

**FFP-type** Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. FFP-5 elements are also available with M16 inner thread. Customers are recommended to contact our application engineers for further technical information on products and applications.


Applications: supporting and stabilizing pipe sections and exhaust systems.

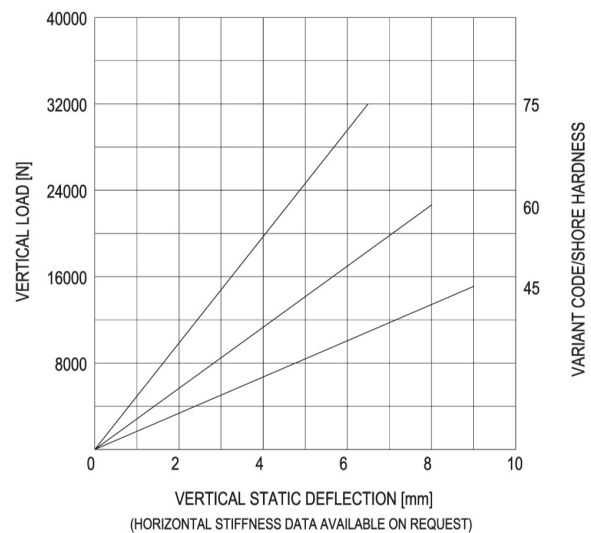

**SIDE-VIEW**

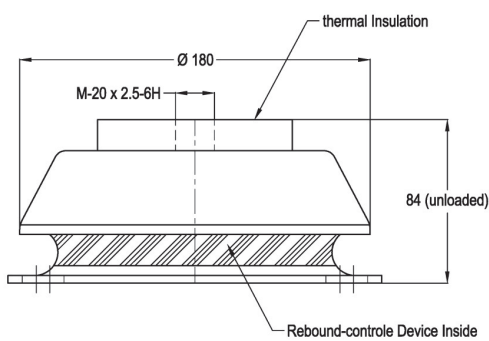

**TOPVIEW**

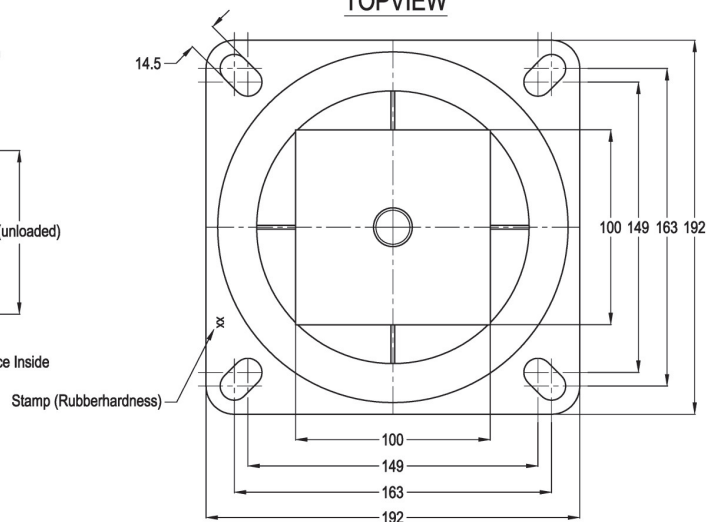








## FFP-Mounting

### type 20-FFP-6


Max. 4000 kg - 8 mm - 5.5 Hz

**FFP-type** Flexible Fixed Points are used to support both vertical pipe sections and exhaust silencers. They are fitted with a thermal insulating plate for heat protection and feature protection against complete loss of support in the event of mechanical or fire damage. Customers are recommended to contact our application engineers for further technical information on products and applications.

Applications: supporting and stabilizing pipe sections and exhaust systems.

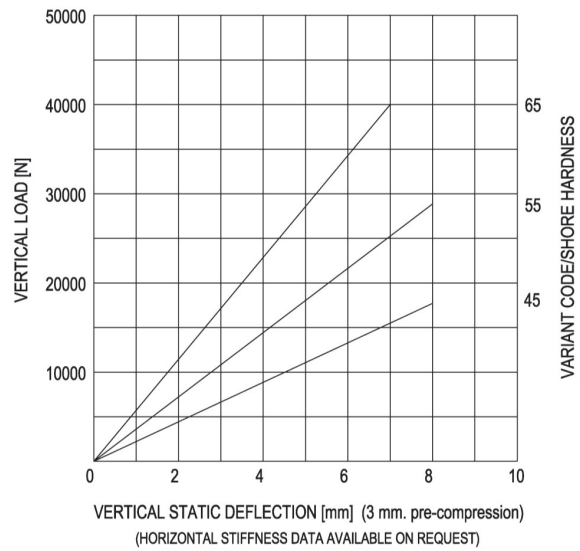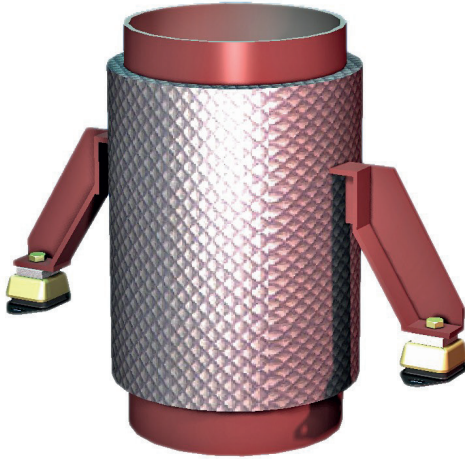

SIDE-VIEW

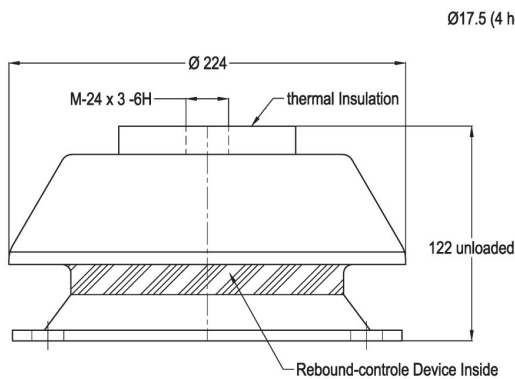

TOPVIEW

